




date	
customer	
project	
quantity	

LICHTKANAL 045 Lighting

System

LICHTKANAL is available in several variations. The diffuser is in form of different acrylic profiles for various lighting tasks. All Lichtkanal sizes are characterized by their continuously illuminated surface. Individual solutions, e.g. wall-ceiling or wall-edge solutions can be designed.

- acrylic diffuser profile with snap-in technique
- highest-quality aluminum profile
- various suspension systems available as accessories

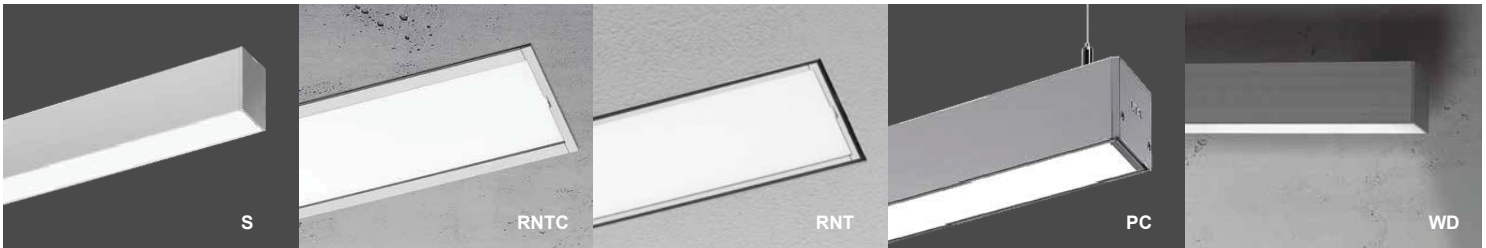

example...

Family	Profile size	Mounting	Insert CCT	Performance	Finish	Remote	Input voltage	Run Length
LK	LK045	PC	40	L	S	A	u	12'

Family	Profile size	Mounting	Insert CCT	Performance	Finish	Remote	Input voltage	Run Length																		
LK	LK45	45mm (1.78")	RT	recess with trim - housing for drywall	27	2700K	L	1100lm/ft	S	silver	N	non-dim	120	120V	*4'											
																RNT	recess without trim - housing for drywall	30	3000K	B	black	A	0-10V	277	277V	5'
																RNC	recess with trim - housing for concrete	35	3500K	W	white	U	universal	6'		
																RNTC	recess without trim - housing for concrete	40	4000K					7'		
																PC	pendant - cables incl.							8'		
																S	surface ceiling							9'		
																WD	wall direct (downlight)							10'		
WI	wall direct (uplight)							11'																		
								12'																		



Notes: *4' is the smallest length for all sizes
*13' is the longest length for all sizes

