




date	
customer	
project	
quantity	

LICHTKANAL 070 Lighting

System

LICHTKANAL is available in several variations. The diffuser is in form of different acrylic profiles for various lighting tasks. All Lichtkanal sizes are characterized by their continuously illuminated surface. Individual solutions, e.g. wall-ceiling or wall-edge solutions can be designed.

- acrylic diffuser profile with snap-in technique
- highest-quality aluminum profile
- various suspension systems available as accessories

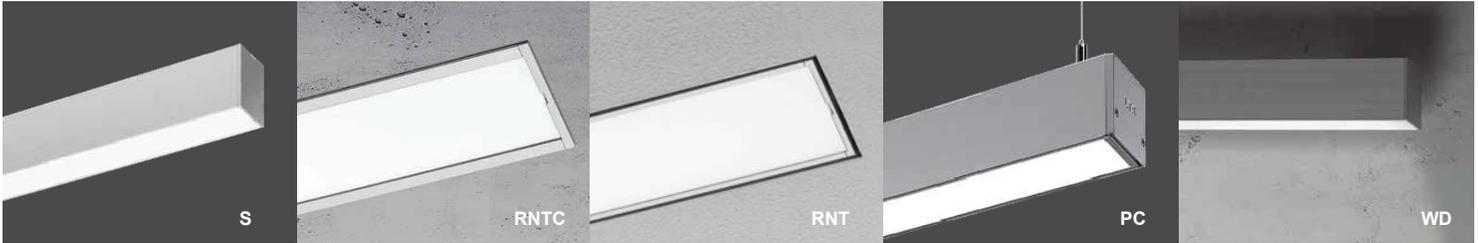

example...

Family	Profile size	Mounting	Insert CCT	Performance	Finish	Driver	Input voltage	Run Length
LK	LK070	PC	40	L	S	A	U	12'

Family	Profile size	Mounting	Insert CCT	Performance	Finish	Driver	Input voltage	Run Length				
LK	LK70 70mm (2.76")	RT	recess with trim - for drywall	27	2700K	L	1100m/ft	S silver	N non-dim	120	120V	*4'
		RNT	recess w/out trim - for drywall	30	3000K			B black	A 0-10V	277	277V	5'
		RTC	recess with trim - for concrete	35	3500K			W white		U	universal	6'
		RNTC	recess w/out trim - for concrete	40	4000K							7'
		RST	recess suspended ceiling w/trim IP54									8'
		RT54	recess w/trim IP54 - for concrete									9'
		RNT54	recess w/out trim IP54 - for concrete									10'
		PC	pendant - cables included									11'
		PDIDC	pendant direct/indirect dual chambers - cables incl									12'
		P54C	pendant IP54 - cables included surf ceiling									
		S	surface ceiling									
		S54	surface ceiling IP54									
		WD	wall direct (downlight)									
WI	wall direct (uplight)											
WDI	wall direct/indirect											
WD154	wall direct IP54											

Notes: *4' is the smallest length for all sizes
*13' is the longest length for all sizes

