



| | |
|----------|--|
| date | |
| customer | |
| project | |
| quantity | |

LedFloodStrip® DOTFREE is a linear lighting range for indoor and outdoor (IP66) applications designed to provide decorative lighting effects which are mainly characterized by its small size, low power consumption and easy installation.

The linear lightings fixture is made of an anodized aluminum body with a milky diffuser. The union between luminaries is through male-female connection.

LedFloodstrip® DOTFREE provide new details such as ESCHA (IP66) connectors and the new aluminum profile which offers the possibility to rotate the luminaries up to 180°.

LED FLOOD STRIPS



| example... | Family | Model / Length | Color Temp | Mounting | Driver | IP Rating | Input voltage |
|------------|--------|----------------|-------------|---------------------|-----------|-----------|----------------|
| | LFS | C1 1000 39.4in | 80/3K 3000K | C CLIP --- STANDARD | N non dim | 66 IP66 | 24 24VDC input |


| Family | Model / Length | Color Temp | Mounting | Driver | IP Rating | Input voltage | Run Length |
|--------|----------------|--------------------|-------------------------|-----------|-----------|----------------|------------------------|
| LFS | | | | | | | * Advise on Run Length |
| | C1 1000 39.4in | 80/2K7 2700K | C CLIP --- STANDARD | N non dim | 66 IP66 | 24 24VDC input | |
| | C2 750 29.5in | 80/3K 3000K | NAB NON ADJUSTABLE BASE | D DMX | | 120/277V | |
| | C3 500 19.7in | 80/4K 4000K | SB SWIVEL BASE | A 0-10V | | | |
| | C4 250 9.84in | 80/6K 6000K | | | | | |
| | | RGBW RGB + (4000K) | | | | | |



* max continuous run cannot exceed 96 watts

MEASURES

LedFloodStrip® I Dotfree (Not adjustable) with clip



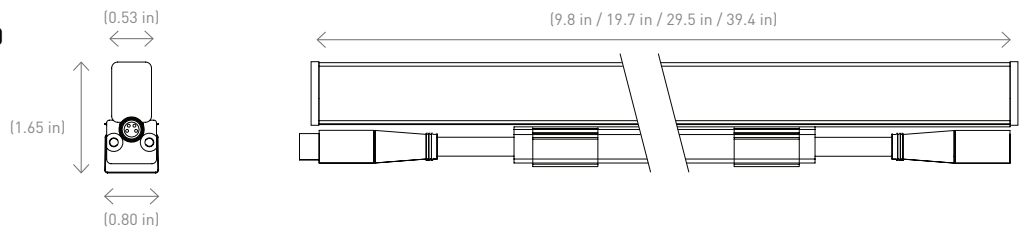


BRACKETS

LedFloodStrip® I Dotfree clip


LedFloodStrip® I Dotfree not adjustable base

LedFloodStrip® I Dotfree swivel base

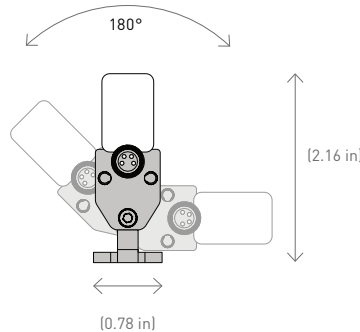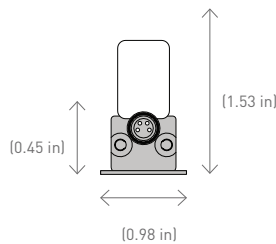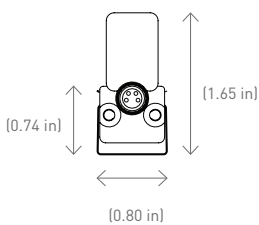


LED FLOOD STRIPS

LedFloodStrip® I Dotfree
with clip

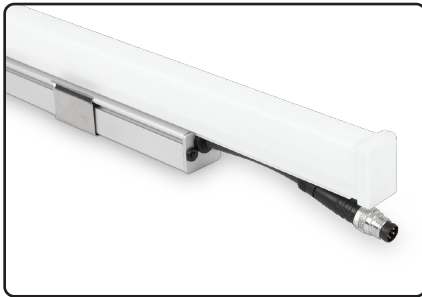

LedFloodStrip® I Dotfree
with non-adjustable base

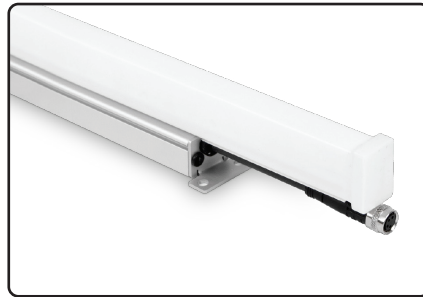

LedFloodStrip® I Dotfree
with swivel base



| LedFloodStrip® I Dotfree | | | | | | | | | |
|--------------------------|----------------------------|---------|---------|---------|----------------|--------|-------|--------|---------|
| 1000 mm | | | | | | | | | |
| Power | 17,6 W (80 LEDs) | | | | 24 W (80 LEDs) | | | | |
| Color temperature | 2700K | 3000K | 4000K | 6000K | RGBW | | | | |
| | | | | | R | G | B | 4000K | R+G+B+W |
| Lumens output | 891 lm | 940 lm | 990 lm | 1089 lm | 252 lm | 408 lm | 60 lm | 340 lm | 1060 lm |
| Luminaire efficiency | 51 lm/W | 53 lm/W | 56 lm/W | 62 lm/W | 44 lm/W | | | | |
| Measures / Weight | 1000 x 42 x 26 mm / 660 gr | | | | | | | | |
| 750 mm | | | | | | | | | |
| Power | 13,2 W (60 LEDs) | | | | 18 W (60 LEDs) | | | | |
| Color temperature | 2700K | 3000K | 4000K | 6000K | RGBW | | | | |
| | | | | | R | G | B | 4000K | R+G+B+W |
| Lumens output | 669 lm | 706 lm | 743 lm | 817 lm | 189 lm | 306 lm | 45 lm | 255 lm | 795 lm |
| Luminaire efficiency | 51 lm/W | 53 lm/W | 56 lm/W | 62 lm/W | 44 lm/W | | | | |
| Measures / Weight | 750 x 42 x 26 mm / 540 gr | | | | | | | | |
| 500 mm | | | | | | | | | |
| Power | 8,8 W (40 LEDs) | | | | 12 W (40 LEDs) | | | | |
| Color temperature | 2700K | 3000K | 4000K | 6000K | RGBW | | | | |
| | | | | | R | G | B | 4000K | R+G+B+W |
| Lumens output | 446 lm | 470 lm | 495 lm | 544 lm | 126 lm | 204 lm | 30 lm | 170 lm | 530 lm |
| Luminaire efficiency | 51 lm/W | 53 lm/W | 56 lm/W | 62 lm/W | 44 lm/W | | | | |
| Measures / Weight | 500 x 42 x 26 mm / 405 gr | | | | | | | | |
| 250 mm | | | | | | | | | |
| Power | 4,4 W (20 LEDs) | | | | 6 W (20 LEDs) | | | | |
| Color temperature | 2700K | 3000K | 4000K | 6000K | RGBW | | | | |
| | | | | | R | G | B | 4000K | R+G+B+W |
| Lumens output | 223 lm | 236 lm | 248 lm | 273 lm | 63 lm | 102 lm | 15 lm | 85 lm | 265 lm |
| Luminaire efficiency | 51 lm/W | 53 lm/W | 56 lm/W | 62 lm/W | 44 lm/W | | | | |
| Measures / Weight | 250 x 42 x 26 mm / 280 gr | | | | | | | | |