

date	
customer	
project	
quantity	

- . Continuous light for paths and squares
- . Homogenous light without visible dots
- . Linear rigid body
- . Protection class IP67
- . Small dimensions
- . Easy serial connection

SLIM GROUND LINER



24V DC	remote driver box	ETL	LED	↓	CRI80	IP 67	IK 09	-22°F +158°F	III	Dimmable	AL Housing	PMMA Cover
--------	-------------------	-----	-----	---	-------	-------	-------	-----------------	-----	----------	------------	------------

Family	Model / Length	Color temp	Driver	Input voltage	Run Length
SGL					
	7101211 39.4in 1000	/80/2K8 2800K	N NON-DIM	24 24VDC input 120/227V	*** advise on run length
	7101212 29.5in 750	/80/4K 4000K	A 0-10V		
	7101213 19.7in 500	/80/5K5 5500K	D DMX		
	7101214 *9.84in 250	/11 **RGB			




Notes:

- (*) only suitable for end of the run
- (**) only available for sizes 3 (19.7") & 1 (39.4")
- (***) max continuous run cannot exceed 96 watts

example...

Family	Model / Length	Color temp	Driver	Input voltage
SGL	7101211 39.4in 1000	/80/2K8 2800K	A	24

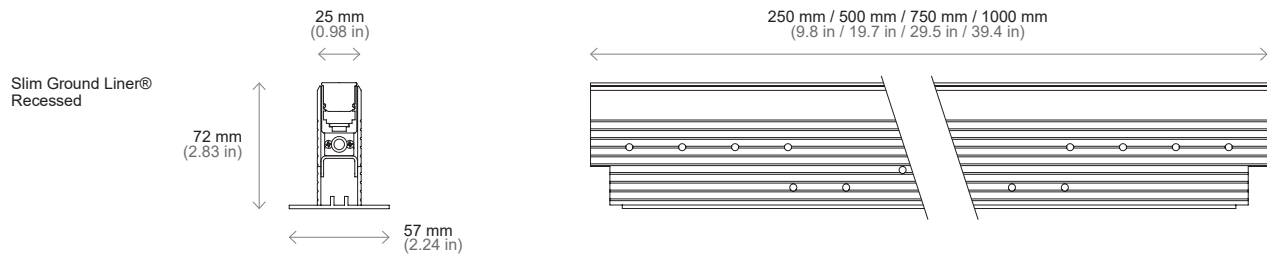

SLIM GROUND LINER

Slim Ground Liner® 1000							
(with recessed box)							
Measures	25 x 72 x 1000 mm						
Weight	2,1 kg						
Color temperatures	2800K	4000K	5500K	Amber	Red	Blue	RGB
Power	11.6 W	11.6 W	11.6 W	5.8 W	5.8 W	11.6 W	22 W
Lumens output	253 lm	270 lm	310 lm	63 lm	32 lm	28 lm	275 lm
N° LEDs	120 LEDs	120 LEDs	120 LEDs	120 LEDs	120 LEDs	120 LEDs	90 LEDs
Luminaire efficiency	32 lm/W	34 lm/W	39 lm/W	11 lm/W	6 lm/W	4 lm/W	13 lm/W

Slim Ground Liner® 750							
(with recessed box)							
Measures	25 x 72 x 750 mm						
Weight	1,6 kg						
Color temperatures	2800K	4000K	5500K	Amber	Red	Blue	RGB
Power	8.7 W	8.7 W	8.7 W	4.4 W	4.4 W	8.7 W	Not available No disponible
N° LEDs	90 LEDs	90 LEDs	90 LEDs	90 LEDs	90 LEDs	90 LEDs	
Lumens output	190 lm	203 lm	240 lm	48 lm	24 lm	21 lm	
Luminaire efficiency	32 lm/W	34 lm/W	39 lm/W	11 lm/W	5 lm/W	4 lm/W	

Slim Ground Liner® 500							
(with recessed box)							
Measures	25 x 72 x 500 mm						
Weight	1,1 kg						
Color temperatures	2800K	4000K	5500K	Amber	Red	Blue	RGB
Power	5.8 W	5.8 W	5.8 W	2.9 W	2.9 W	5.8 W	11 W
N° LEDs	60 LEDs	60 LEDs	60 LEDs	60 LEDs	60 LEDs	60 LEDs	45 LEDs
Lumens output	125 lm	131 lm	153 lm	32 lm	16 lm	14 lm	134 lm
Luminaire efficiency	31 lm/W	33 lm/W	39 lm/W	11 lm/W	6 lm/W	4 lm/W	12 lm/W

Slim Ground Liner® 250							
(with recessed box)							
Measures	25 x 72 x 250 mm						
Weight	0,6 kg						
Color temperatures	2800K	4000K	5500K	Amber	Red	Blue	RGB
Power	2.9 W	2.9 W	2.9 W	1.5 W	1.5 W	2.9 W	Not available No disponible
N° LEDs	30 LEDs	30 LEDs	30 LEDs	30 LEDs	30 LEDs	30 LEDs	
Lumens output	62 lm	67 lm	78 lm	16 lm	8 lm	6 lm	
Luminaire efficiency	31 lm/W	34 lm/W	39 lm/W	11 lm/W	6 lm/W	4 lm/W	