

Pendant Luminaire


date ______ customer ______ project ______ quantity _____

LED pendant luminaire for presentation of goods and general lighting, outstanding ease of maintenance, no UV and thermal emissions, thermal management with passive cooling, prismatic acrylic glass reflector with bayonet catch, conical technique unit made from polycarbonate, inner specular reflector made from high-quality aluminum 99.98%, optional: safety glass with retaining ring for inner reflector, luminaire fitted with anchor hook, suspension to be ordered separately, luminaire ready-to-connect with ceiling box, LED converter integrated.





Family Wattage / Lumens	Color temp	Suspension	Protection	Beam	Finish	Driver	CRI	Input voltage
САР]			
300A 27W >2820Im 300B 36W >3540Im c	27 2700K 30 3000K 40 4000K	C chain W wire rope	N none S safety glass	35 35 deg 55 55 deg	S silver	N non dim A 0-10V	80 CRI80	120 120V input 277 277V input
w								
S								

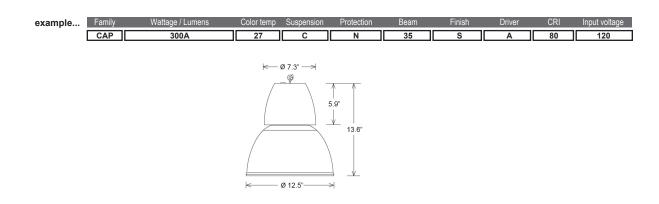

300