




date	
customer	
project	
quantity	

LED recessed spotlight in round design with recessed funnel, spotlight-insert pivots through 15°, outstanding ease of maintenance, no UV and thermal emissions, thermal management with passive cooling, TIR reflector lense made from PMMA, recessed funnel made from die-cast aluminum, variable ceiling thickness, tool-free ceiling mounting via quick-action clamping springs, prefabricated for mains connection, LED converter included (positioned outside of the luminaire body).

# VALE-TU Luminaire

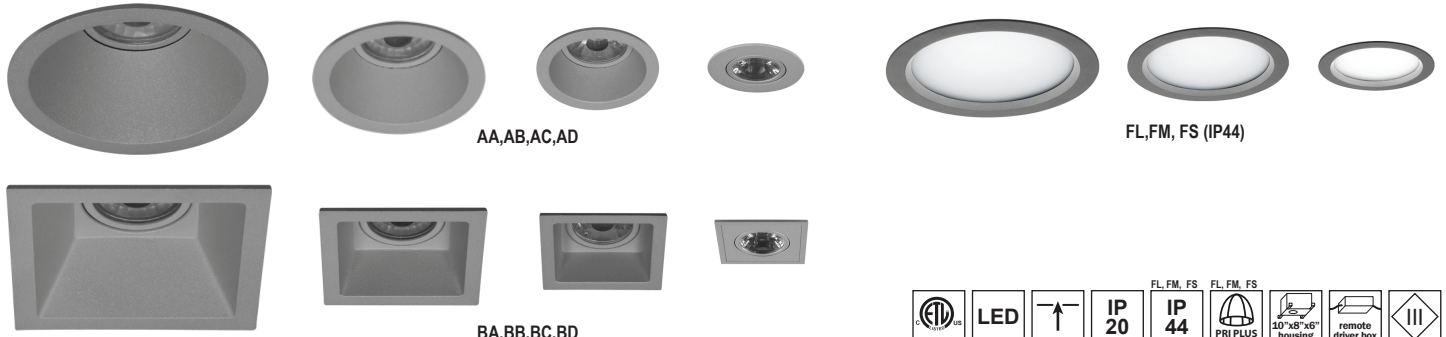

Family	Wattage / Lumens / Mounting			Color temp		Beam		Finish		Driver		CRI		Input voltage		
<b>VALE-TU</b>																
 N1, A1	AA	12W	>690lm	large round	27	2700K	F	flood	S	silver	N1	* non dim	80	CRI80	120	120V input
	AB	12W	>690lm	medium round	30	3000K	WF	wide-flood	W	white	N2	** non dim			277	277V input
	AC	12W	>690lm	small round	40	4000K	G	(G) general	R	RAL color	A1	* 0-10V				
	AD	12W	>690lm	xsmall round							A2	** 0-10V				
	BA	12W	>690lm	large square							C	consult for options				
	BB	12W	>690lm	medium square												
	BC	12W	>690lm	small square												
	BD	12W	>690lm	xsmall square												
	FL	32W	>2620lm	flat large												
	FM	21W	>1580lm	flat medium												
	FS	15W	>970lm	flat small												

Notes: (G) only in FL, FM, FS  
 (\*) driver and fixture with new construction housing - contact sales for datasheet  
 (\*\*) remote driver in enclosed box - contact sales for datasheet

example...

Family	Wattage / Lumens / Mounting			Color temp		Beam		Finish		Driver		CRI		Input voltage	
VALE-TU	AA			27		S		S		A1		80		120	

