


DATE:

CUSTOMER:

PROJECT:

QUANTITY:

PLLAC.20P *Round 67W / 97W / 156W / 265W / 390W LED Full-Acrylic Pendant-Mounted Light*

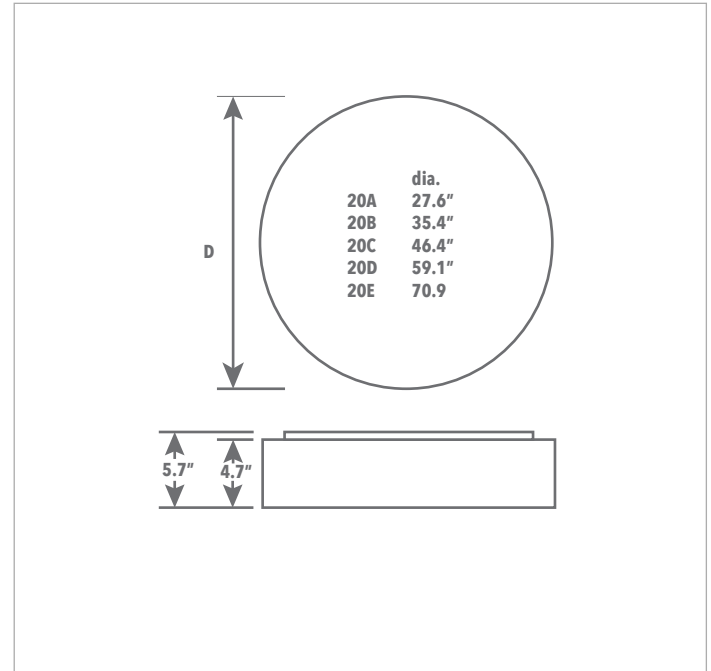

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	FINISH	DRIVER	CRI	INPUT VOLTAGE
PLLAC	PLLAC.20CP	156W	13200lm	30	A	A	80	120











FAMILY	ITEM#	WATTAGE	LUMENS	CCT	FINISH	DRIVER	CRI	INPUT VOLTAGE
PLLAC	PLLAC.20AP	67W	5600lm	30	3000K	A Non-Dim	80	120
	PLLAC.20BP	97W	7900lm	40	4000K	A 0-10V	90	277
	PLLAC.20CP	156W	13200lm			C Consult	*CRI90	
	PLLAC.20DP	265W	21500lm					
	PLLAC.20EP	390W	32900lm					

NOTES	Prestigious pendant luminaire in round design for homogenous lighting and balanced with round design for homogenous lighting and balanced room ambience, easy maintenance, no UV and thermal emissions, ceiling mounting plate and technique unit made from metal, wire-rope suspension to be ordered separately, pendant-rod suspension on request, opal-white acrylic diffuser (removable via lock fasteners), ceiling mounting via screwable plate, 5-pole terminal block, LED converter integrated.	* CRI90 (subject to availability)	WEB LINKS: Product Page