


PLL28 *Round 25.5W / 45.8W / 94.3W / 188.4W LED Direct / Indirect Pendant-Mounted Light*

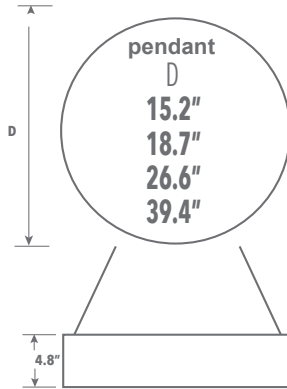

PLL28

Driver is Universal 0-10V

FAMILY	PART#	Size	Watts/Lumens	Temp	Finish
	L640143	15.2"	25.5W/2890lm	3000K	Silver
	L640144	15.2"	25.5W/2890lm	3000K	White
	L642244	15.2"	25.5W/2890lm	3000K	Black
	L640147	15.2"	25.5W/2980lm	4000K	Silver
	L640148	15.2"	25.5W/2980lm	4000K	White
	L642246	15.2"	25.5W/2980lm	4000K	Black
	L640151	18.7"	45.8W/5210lm	3000K	Silver
	L640152	18.7"	45.8W/5210lm	3000K	White
	L642248	18.7"	45.8W/5210lm	3000K	Black
	L640155	18.7"	45.8W/5370lm	4000K	Silver
	L640156	18.7"	45.8W/5370lm	4000K	White
	L642250	18.7"	45.8W/5370lm	4000K	Black
	L640159	26.6"	94.3W/10500lm	3000K	Silver
	L640160	26.6"	94.3W/10500lm	3000K	White
	L642252	26.6"	94.3W/10500lm	3000K	Black
	L640163	26.6"	94.3W/10820lm	4000K	Silver
	L640164	26.6"	94.3W/10820lm	4000K	White
	L642254	26.6"	94.3W/10820lm	4000K	Black
	L640167	39.4"	188.4W/25140lm	3000K	Silver
	L640168	39.4"	188.4W/25140lm	3000K	White
	L642240	39.4"	188.4W/25140lm	3000K	Black
	L640171	39.4"	188.4W/25600lm	4000K	Silver
	L640172	39.4"	188.4W/25600lm	4000K	White
	L642242	39.4"	188.4W/25600lm	4000K	Black

NOTES	Prestigious pendant luminaire with round design for homogenous and sophisticated direct and indirect architectural lighting, no UV and thermal emissions, metal housing, easy ceiling mounting, wire-rope suspension to be ordered separately, opal white diffuser made from UV and heat-resistant acrylic glass, 5-pole terminal block, LED converter integrated.	INCLUDED: Ø 5.0" mounting plate	WEB LINKS: