



date	
customer	
project	
quantity	

HALO LED

Ceiling Pendant-Mounted



P


High-class ring LED luminaire, designed for direct-indirect light emission, with lamp housing in a compact design made of seamlessly welded steel sheet. Mounting by suspension cables, infinitely adjustable with quick release. 1:1 direct-indirect equal emission of light. Light emission through diffusers made of satined PMMA for an almost homogeneous emission of light. Diffusers direct-indirect with a height of 8mm for lateral emission of light. Luminaire equipped with the latest generation of LEDs, color rendering index Ra > 80, small color tolerance MacAdam 3. Electrical connection through 3 or 5-pin transparent power supply cable and ceiling housing. Optional mounting positions of the ceiling housing: offset or central.



Family	Diameter / Wattage / Lumens / Beam / IP Rating					Mounting		CCT		Finish		Driver		Input voltage	
HALO															
PENDANT-1	29.9"	40W	>3791lm	dir.	IP20	P1	pendant	830	3000K	W	white	A	0-10V	120	120V input
PENDANT-2	40.9"	51W	>4493lm	dir.	IP20		1 point suspension	840	4000K	S	silver	C	consult for	277	277V input
PENDANT-3	48.0"	67W	>6183lm	dir.	IP20	P3	pendant			R	RAL color		options	UNI	universal input
PENDANT-4	53.5"	73W	>7224lm	dir.	IP20		3 point suspension								
PENDANT-5	29.9"	81W	>7584lm	dir.-ind.	IP40	P4	pendant								
PENDANT-6	40.9"	102W	>8969lm	dir.-ind.	IP40		4 point suspension								
PENDANT-7	48.0"	134W	>12388lm	dir.-ind.	IP40										
PENDANT-8	53.5"	146W	>14417lm	dir.-ind.	IP40										


Notes: (*)

example...	Family	Diameter / Wattage / Lumens / Beam / IP Rating				Mounting	CCT	Finish	Driver	Input voltage
	HALO	PENDANT-1				P1	830	W	A	120

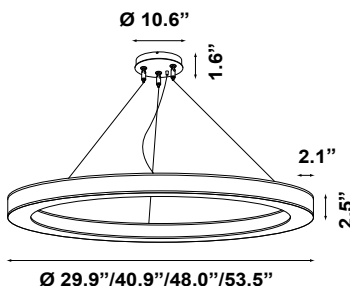


P1

mounting

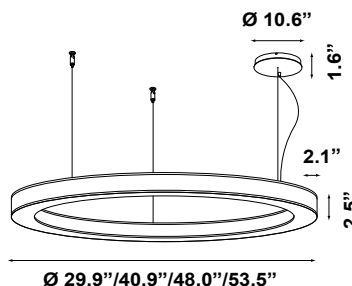

P3

mounting

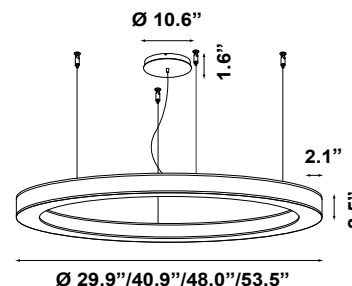

P4

mounting