



DATE:

CUSTOMER:

PROJECT:

QUANTITY:

PLL26 *Round 25.5W / 45.8W / 94.3W / 188.4W LED Direct / Indirect Surface-Mounted Light*

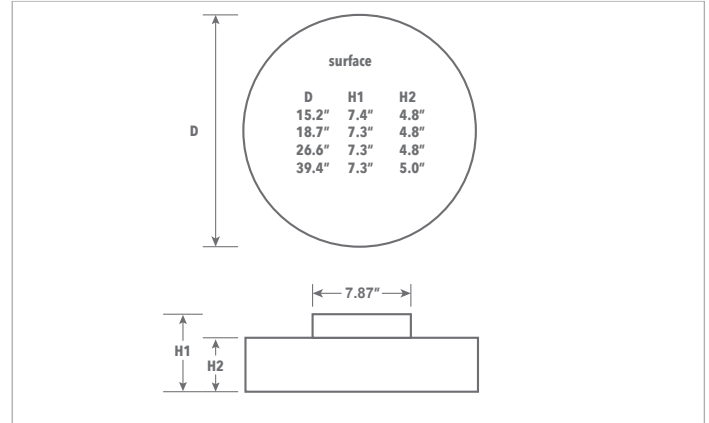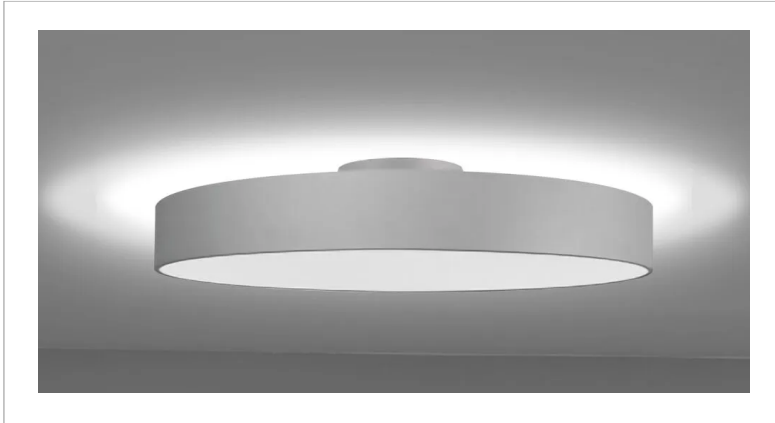

PLL26

Driver is Universal 0-10V

FAMILY	PART#	Size	Watts/Lumens	Temp	Finish
	L640111	15.2"	25.5W/2890lm	3000K	Silver
	L640112	15.2"	25.5W/2890lm	3000K	White
	L642212	15.2"	25.5W/2890lm	3000K	Black
	L640115	15.2"	25.5W/2980lm	4000K	Silver
	L640116	15.2"	25.5W/2980lm	4000K	White
	L642214	15.2"	25.5W/2980lm	4000K	Black
	L640119	18.7"	45.8W/5210lm	3000K	Silver
	L640120	18.7"	45.8W/5210lm	3000K	White
	L642216	18.7"	45.8W/5210lm	3000K	Black
	L640123	18.7"	45.8W/5370lm	4000K	Silver
	L640124	18.7"	45.8W/5370lm	4000K	White
	L642218	18.7"	45.8W/5370lm	4000K	Black
	L640127	26.6"	94.3W/10500lm	3000K	Silver
	L640128	26.6"	94.3W/10500lm	3000K	White
	L642220	26.6"	94.3W/10500lm	3000K	Black
	L640131	26.6"	94.3W/10820lm	4000K	Silver
	L640132	26.6"	94.3W/10820lm	4000K	White
	L642222	26.6"	94.3W/10820lm	4000K	Black
	L640135	39.4"	188.4W/25140lm	3000K	Silver
	L640136	39.4"	188.4W/25140lm	3000K	White
	L642208	39.4"	188.4W/25140lm	3000K	Black
	L640139	39.4"	188.4W/25600lm	4000K	Silver
	L640140	39.4"	188.4W/25600lm	4000K	White
	L642210	39.4"	188.4W/25600lm	4000K	Black

<p>NOTES</p>	<p>Prestigious surface-mounted luminaire with round design for homogenous and sophisticated direct and indirect architectural lighting, no UV and thermal emissions, metal housing, easy ceiling mounting, opal white diffuser made from UV and heat-resistant acrylic glass, 5-pole terminal block, LED converter integrated.</p>	<p>INCLUDED:</p>	<p>WEB LINKS:</p>
---------------------	--	-------------------------	--------------------------