

date	
customer	
project	
quantity	

HALO LED

Luminaire




High-class ring LED luminaire, designed for direct-indirect light emission, with lamp housing in a compact design made of seamlessly welded steel sheet. Mounting by suspension cables, infinitely adjustable with quick release. 1:1 direct-indirect equal emission of light. Light emission through diffusers made of satined PMMA for an almost homogeneous emission of light. Diffusers direct-indirect with a height of 8mm for lateral emission of light. Luminaire equipped with the latest generation of LEDs, color rendering index Ra > 80, small color tolerance MacAdam 3. Electrical connection through 3 or 5-pin transparent power supply cable and ceiling housing. Optional mounting positions of the ceiling housing: offset or central.




Family		Diameter / Wattage / Lumens / Beam / IP Rating					Mounting		CCT		Finish		Driver		Input voltage	
HALO																
PENDANT-1		17.7"	23W	>2252lm	dir.	IP20	P1	pendant	830	3000K	W S B R	white silver black RAL color	A	0-10V	UNI	universal input
PENDANT-2		29.9"	40W	>3791lm	dir.	IP20		1 point suspension	840	4000K						
PENDANT-3		40.9"	51W	>4493lm	dir.	IP20	P3	pendant								
PENDANT-4		48.0"	67W	>6183lm	dir.	IP20		3 point suspension								
PENDANT-5		53.5"	73W	>7224lm	dir.	IP20	P4	pendant								
PENDANT-6		17.7"	45W	>4504lm	dir.-ind.	IP40		4 point suspension								
PENDANT-7		29.9"	81W	>7584lm	dir.-ind.	IP40										
PENDANT-8		40.9"	102W	>8969lm	dir.-ind.	IP40										
PENDANT-9		48.0"	134W	>12388lm	dir.-ind.	IP40										
PENDANT-10		53.5"	146W	>14417lm	dir.-ind.	IP40										


example...	Family	Diameter / Wattage / Lumens / Beam / IP Rating					Mounting	CCT		Finish	Driver	Input voltage	
	HALO	P1					P1	830		W	A	U	

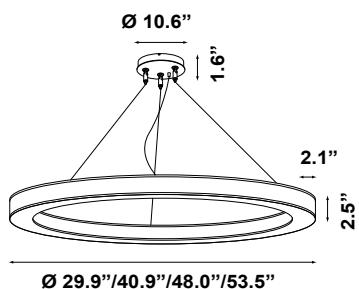

P1

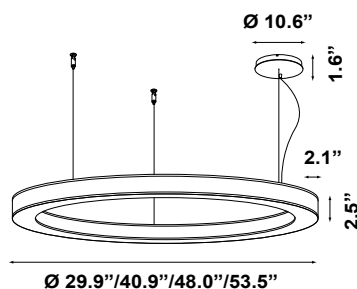

P3

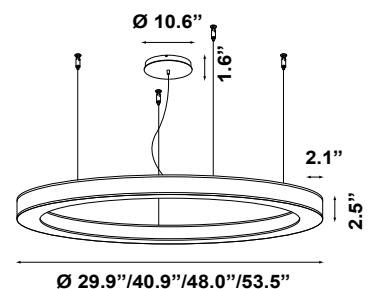

P4