



# LINEAR FLEX

LINEAR FLEX DYNAMIC COLORS



date

customer

project

quantity

The new ranges of Linear Flex® are the flexible linear LED solutions, for applications with curving linear surfaces or limited space. Those fixtures are used to provide high performance indirect lighting.


Linear Flex® is supplied in rolls with different power consumption.

The Linear Flex® works under 24V DC and requires a power supply for its correct functioning.


The product is very flexible and can be installed easily onto any surface. It's small size enables it to be seamlessly integrated into architectural spaces.

### Cove lighting and other applications



- 3 MacAdam: chromatic stability control
- RGBW – DYNAMIC COLORS
- Dimmable flexible strip
- It can be cut on size at site
- IP20
- Accessories: aluminum profile, diffuser and lenses



Family	Option / CRI / Wattage Per Foot / Color Temp/IP Rating	Lens / Beam		Mounting		Driver	Input Voltage	
<b>L-FLEX</b>	RGBW   80CRI - 7.68W/FT - R/G/B+6000K - IP20	<b>NL</b>	NO LENS 120° FLAT	<b>C</b>	CLIP	<b>N</b>	NON-DIM	24   24VDC
		<b>FC</b>	CLEAR 120° FLAT	<b>B15</b>	15° BRKT	<b>A</b>	0-10V	
		<b>FO</b>	OPAL 120° HIGH	<b>B30</b>	30° BRKT			
		<b>HC</b>	CLEAR 120° HIGH	<b>B45</b>	45° BRKT			
		<b>HO</b>	OPAL 120° ROUND					
		<b>RC</b>	CLEAR 120° ROUND					
		<b>RO</b>	OPAL 120°					
		<b>C30</b>	CLEAR LENS 30°					
		<b>C60</b>	CLEAR LENS 60°					


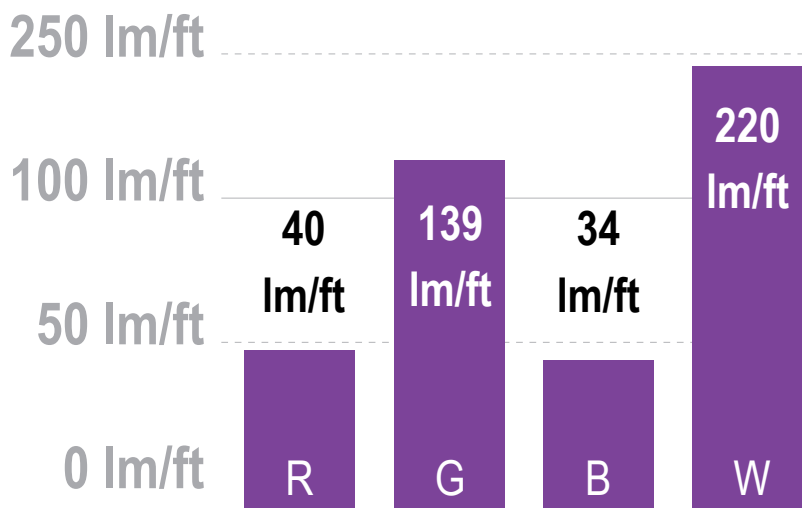


**A** Covers and lens

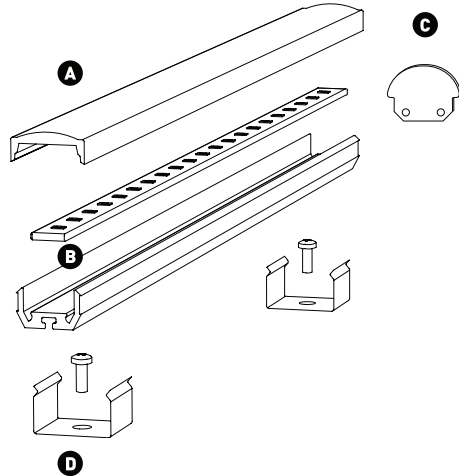
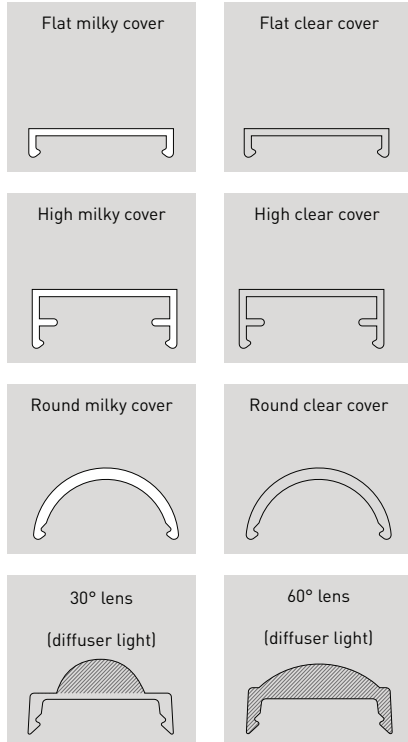


**B** Aluminum profile

**C** End caps

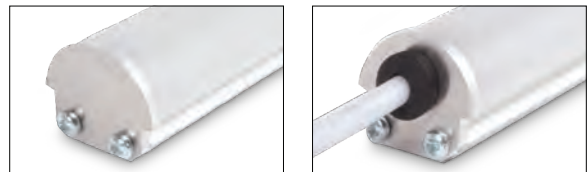


**D** Brackets

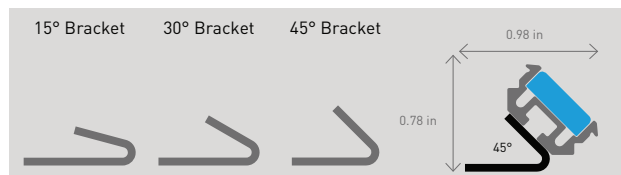


**LED STRIP TABLE COMPATIBLE WITH END CAPS**

Monocolor IP20					CRI>90		
4,8W/m	9,6W/m	14,4W/m	24W/m	33,6W/m	14,4W/m	24W/m	
✓	✓	✓	✓	✓	✓	✓	✓
IP67					RGB	RGBW	DW
4,8W/m	9,6W/m	14,4W/m	24W/m	14,4W/m	16,3W/m	19,2W/m	
✓	✓	✓	✓	✗	✗	✗	







Al. Profile + Clip + Flat milky cover.




Al. Profile + Clip + High milky cover.




Al. Profile + Clip + Round clear cover.



Al. Profile + Clip + 60° Lens.




Al. Profile + Clip + 30° Lens.



Al. Profile + Clip.

Full scale drawings.

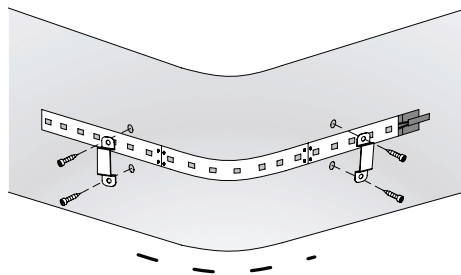

Screws and clips installation



Minimum bending radius 30 mm.



**IP67**  
Temporarily immersion protection