

DATE:



CUSTOMER:

PROJECT:

QUANTITY:


CROSBYDK D69056A, D69056B, D69056C

COB LED In-Ground

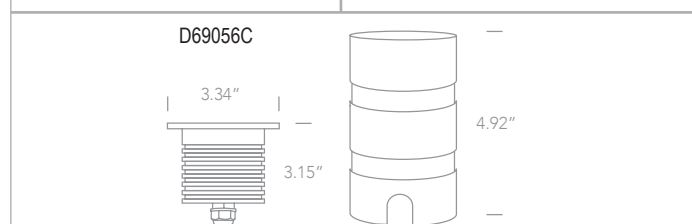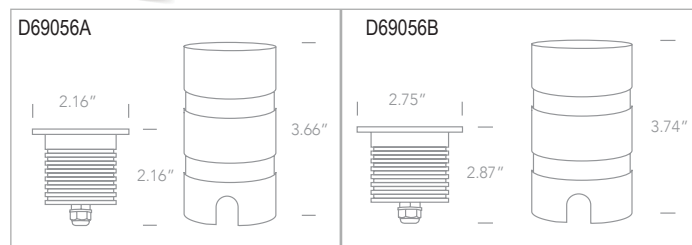

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
CROSBYDK	D69056B	7W	560lm	30	38	AL	A	65	120



FAMILY		ITEM#	WATTAGE	LUMENS	CCT		BEAM		FINISH		DRIVER		IP RATING		INPUT VOLTAGE	
CROSBYDK																
		D69056A	3W	240lm	30	3000K	38	38°	AL	NAT ALUM	N NON-DIM	67	IP67	120/277	*120V - 277V	
		D69056B	7W	560lm	30	3000K	38	38°	AL	NAT ALUM	N NON-DIM	67	IP67	120/277	*120V - 277V	
		D69056C	9W	720lm	30	3000K	38	38°	AL	NAT ALUM	N NON-DIM	67	IP67	120/277	*120V - 277V	

NOTES

D69056A:
120V Not dimmable,
277V consult for dimming

* **D69056A / D69056B / D69056C:**
REQUIRES A 24V-TO-120/277V REMOTE DRIVER

CCT:
3000K CCT = Warm White

WEB LINKS:

D69056A
D69056B
D69056C