



DATE:

CUSTOMER:

PROJECT:


QUANTITY:

ENNEN *D10107UV, D10113UV, D10120UV, D10130UV* 7W, 13W, 20W, 30W SMD LED UGR19 Fixed Recessed Downlight w/ Adjustable CCT

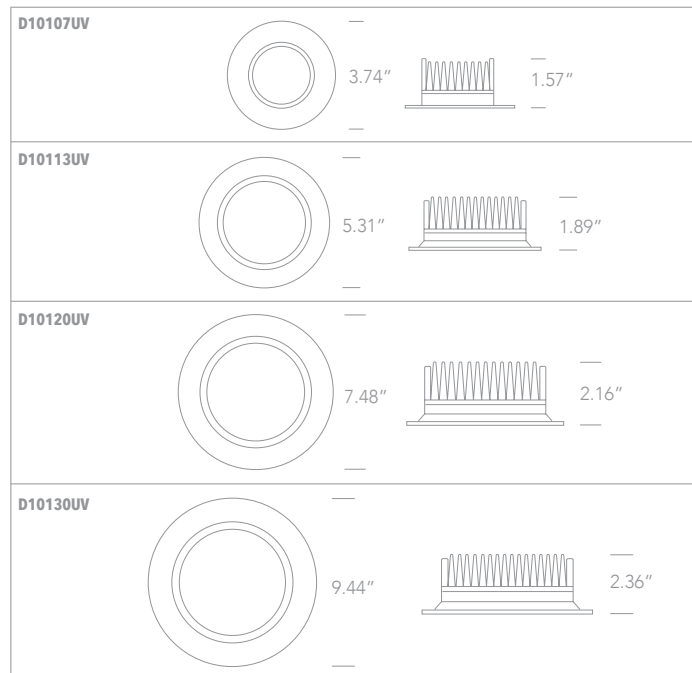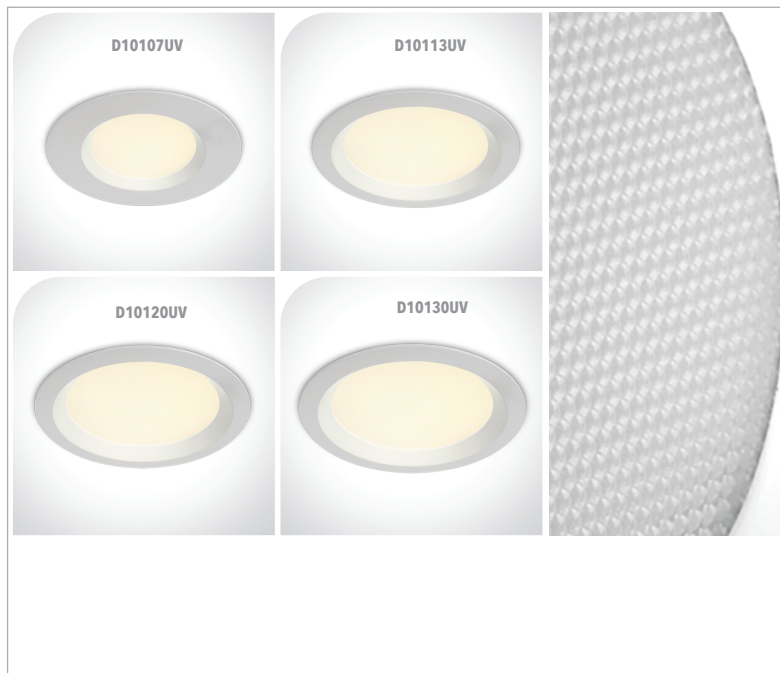

EXAMPLE:

FAMILY	ITEM#	FINISH	WATTAGE	LUMENS	CCT	BEAM	DRIVER	IP RATING	INPUT VOLTAGE
ENNEN	D10113UVW	W	13W	975lm	27/40/60	100	A	44	120



FAMILY	ITEM#	FINISH	WATTAGE	LUMENS	CCT	BEAM	DRIVER	IP RATING	INPUT VOLTAGE
ENNEN									
	D10107UVW	W WHITE	7W	525lm	27/40/60	2700K - 4000K - 6000K	100 100°	A 0-10V	44 IP44
	D10113UVW	W WHITE	13W	975lm	27/40/60	2700K - 4000K - 6000K	100 100°	A 0-10V	44 IP44
	D10120UVW	W WHITE	20W	1500lm	27/40/60	2700K - 4000K - 6000K	100 100°	A 0-10V	44 IP44
	D10130UVW	W WHITE	30W	2250lm	27/40/60	2700K - 4000K - 6000K	100 100°	A 0-10V	44 IP44

NOTES

D10107UV / D10113UV:
New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"
Consult for dimming

D10120UV / D10130UV:
Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable
0-10V dimming option, available for 277V

WEB LINKS:

D10107UV
D10113UV
D10120UV
D10130UV

CCT: Selectable by switch at time of installation.

DALI & DMX OPTION: Available upon request with consultation.