

DATE:


CUSTOMER:

PROJECT:

QUANTITY:

RLINDKU

D38150BRWC, D38150BRWW, D38150BRBC, D38150BRBW, D38145BRWC, D38145BRWW
 40W SMD 3030 LED UGR17/UGR19 dark light, recessed linear w/ diffuser

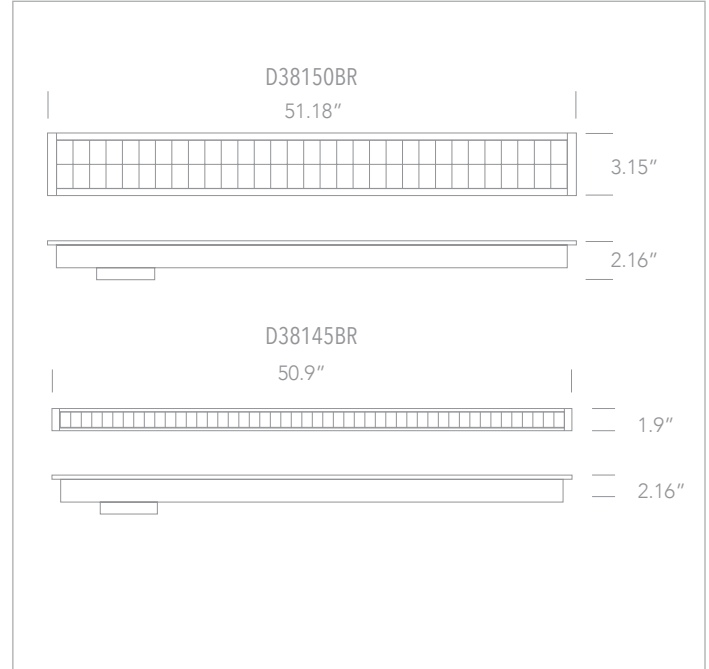

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
RLINDKU	D38150BRWW	40W	4000lm	30	34	W	A	20	120



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
RLINDKU									
	D38145BRWC	40W	4000lm	40 4000K	34 34°	W WHITE	A 0-10V	20 IP20	120/277 120V - 277V
	D38145BRWW	40W	4000lm	30 3000K	34 34°	W WHITE	A 0-10V	20 IP20	120/277 120V - 277V
	D38150BRWC	40W	4000lm	40 4000K	34 34°	W WHITE	A 0-10V	20 IP20	120/277 120V - 277V
	D38150BRWW	40W	4000lm	30 3000K	34 34°	W WHITE	A 0-10V	20 IP20	120/277 120V - 277V
	D38150BRBC	40W	4000lm	40 4000K	34 34°	B BLACK	A 0-10V	20 IP20	120/277 120V - 277V
	D38150BRBW	40W	4000lm	30 3000K	34 34°	B BLACK	A 0-10V	20 IP20	120/277 120V - 277V

NOTES	D38150BR: Remote Driver Enclosure = 6" x 10" x 2" w/10' Standard Connecting Cable	4000K CCT = Cool White 3000K CCT = Warm White	WEB LINKS:
	0-10V dimming option, available for 277V		