

DATE:


CUSTOMER:

PROJECT:

QUANTITY:

# RLINU

*D38150ARWC, D38150ARWW*  
 40W SMD 2835 LED UGR19 recessed linear w/ diffuser 

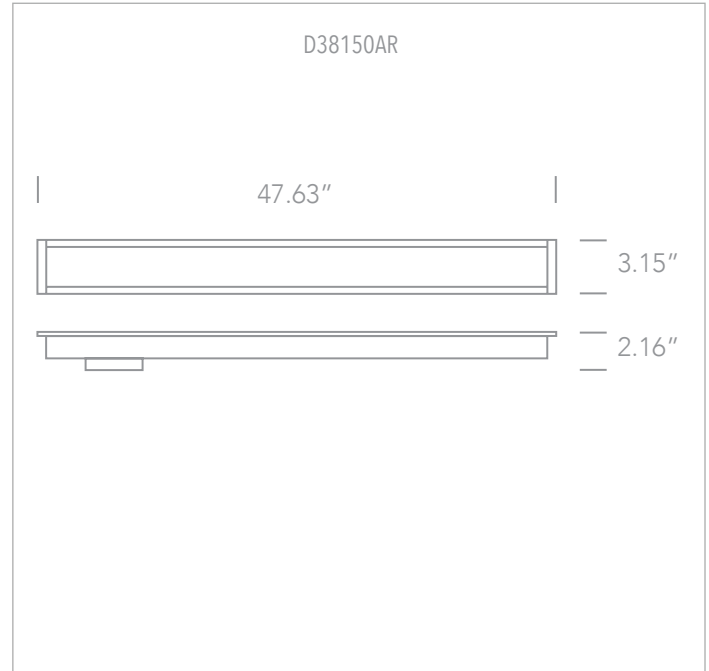

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
RLINU	D38150ARWW	40W	3600lm	30	120	W	A	20	120



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
RLINU									
	D38150ARWC	40W	3600lm	40 4000K	120 120°	W WHITE	A 0-10V	20 IP20	120/277 120V - 277V
	D38150ARWW	40W	3600lm	30 3000K	120 120°	W WHITE	A 0-10V	20 IP20	120/277 120V - 277V

<b>NOTES</b>	<b>D38150AR:</b> Remote Driver Enclosure = 6" x 10" x 2" w/10' Standard Connecting Cable	4000K CCT = Cool White 3000K CCT = Warm White	<b>WEB LINKS:</b>  D38150AR
	0-10V dimming option, available for 277V		