

DATE:


CUSTOMER:

PROJECT:

QUANTITY:

# VERSA *D51206M, D51306M*

*2x6W / 3x6W / LED recessed adjustable spot*

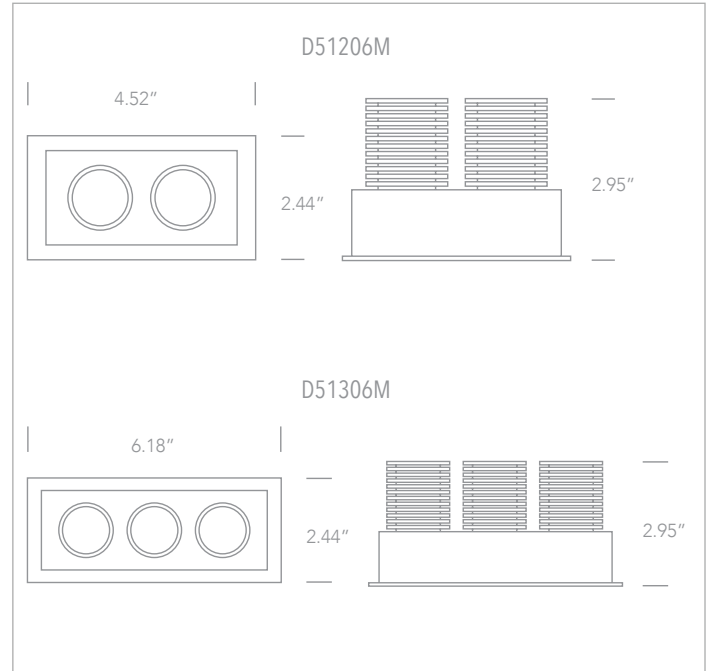

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
VERSA	D51206M	2 X 6W	2 X 540lm	30	24	W	A	20	120



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
VERSA	D51206M	2 X 6W	2 X 540lm	30	3000K 24 24°	W WHITE	A 0-10V	20 IP20	120/277 120V - 277V
	D51306M	3 X 6W	3 X 540lm	30	3000K 24 24°	W WHITE	A 0-10V	20 IP20	120/277 120V - 277V

<b>NOTES</b>	<b>D51206M / D51306M:</b> New Construction Housing Available Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable Installation Depth = 6.5" Consult for dimming	<b>WEB LINKS:</b>  D51206M D51306M