






Recessed Downlights Fixed LED









LED
 BUILT IN


80
 CRI







 2.67"



 1.97" ceiling depth


 120°


D10103T | 3W | SMD LED | *Fixed Recessed Downlight*




IP20




* New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"



 3.54"


 1.37"


120V Not dimmable,
277V consult for dimming


FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
BUNDT	D10103T	3W	210lm	3000K	120°	WHITE	0-10V	IP20	120V - 277V






LED
 BUILT IN


80
 CRI







 3.34"



 2.36" ceiling depth


 120°


D10107T | 7W | SMD LED | *Fixed Recessed Downlight*




IP20




* New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"



 4.57"


 1.65"


Consult for dimming


FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
BUNDT	D10107T	7W	520lm	4000K	120°	WHITE	0-10V	IP20	120V - 277V






LED
 BUILT IN


80
 CRI







 5.11"



 2.36" ceiling depth


 120°


D10115T | 15W | SMD LED | *Recessed Downlight*




IP20



* New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"


 6.29"


 1.69"

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
BUNDT	D10115T	15W	1050lm	3000K	120°	WHITE	0-10V	IP20	120V - 277V







D10124T | 24W | SMD LED | Recessed Downlight



Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
BUNDT	D10124T	24W	1800lm	4000K	120°	WHITE	0-10V	IP20	120V - 277V





D10130T | 30W | SMD LED | Recessed Downlight



Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
BUNDT	D10130T	30W	2250lm	4000K	120°	WHITE	0-10V	IP20	120V - 277V












D10116FD | 7W | LED | *Dark Light Recessed Dome Reflector*

















* New Construction Housing Available
* = 6.5" Ceiling Depth Required


FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
DLDR	D10116FDW	16W	800lm	3000K	G	WHITE	0-10V	IP20	120V - 277V
DLDR	D10116FDB	16W	800lm	3000K	G	BLACK	0-10V	IP20	120V - 277V









D10110U | 10W | SMD LED | *UGR19 Fixed Recessed Downlight*








* New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"









Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
ECO-DU	D10110U	10W	750lm	3000K	G	WHITE	0-10V	IP44	120V - 277V

26

Recessed Downlights Fixed LED











D10124U | 24W | SMD LED | UGR19 Fixed Recessed Downlight

* New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
ECO-DU	D10124U	24W	1800lm	3000K	G	WHITE	0-10V	IP44	120V - 277V







D10130U | 30W | SMD LED | UGR19 Downlight


Remote Driver Enclosure = 6" x 10" x 2" w/10' Standard Connecting Cable

0-10V dimming option, available for 277V


FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
ECO-DU	D10130UW	30W	2250lm	4000K	G	WHITE	0-10V	IP44	120V - 277V
ECO-DU	D10130UB	30W	2250lm	4000K	G	BLACK	0-10V	IP44	120V - 277V

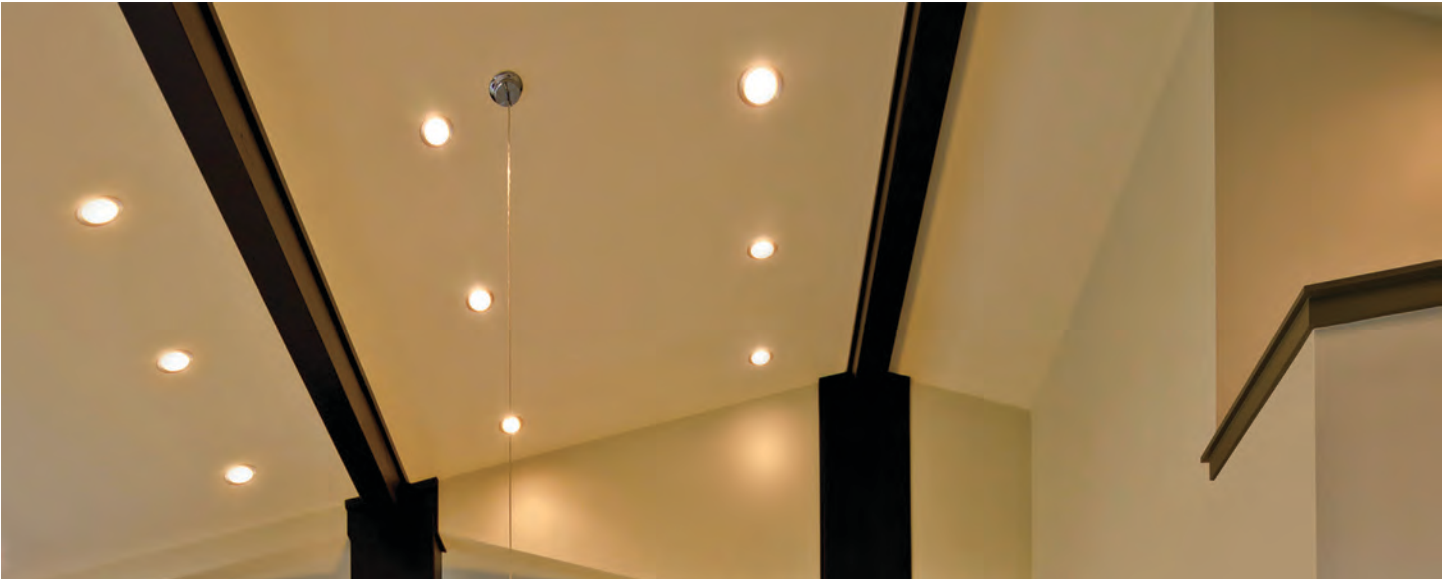







LED
 BUILT IN

80
 CRI



 100°



 2.75"



 2.36" ceiling depth


 100°

D10107UV | 7W | SMD LED | UGR19 Fixed Recessed Downlight w/ Adjustable CCT






 3.74"


 1.57"


* New Construction Housing Available
 Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
 Installation Depth = 6.5"
 Consult for dimming


FAMILY	ITEM#	WATTAGE	LIGHT COLOR	CCT	BEAM	LUMENS	FINISH	DRIVER	INPUT VOLTAGE
ENNEN	D10107UVW	7W	Daylight - Cool White - Warm White	6000K - 4000K - 3000K	100°	525lm	WHITE	0-10V	120V - 277V






LED
 BUILT IN

80
 CRI



 100°



 4.72"



 2.75" ceiling depth


 100°

D10113UV | 13W | SMD LED | UGR19 Fixed Recessed Downlight w/ Adjustable CCT






 5.31"


 1.89"


* New Construction Housing Available
 Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
 Installation Depth = 6.5"
 Consult for dimming


FAMILY	ITEM#	WATTAGE	LIGHT COLOR	CCT	BEAM	LUMENS	FINISH	DRIVER	INPUT VOLTAGE
ENNEN	D10107UVW	13W	Daylight - Cool White - Warm White	6000K - 4000K - 3000K	100°	975lm	WHITE	0-10V	120V - 277V






LED
 BUILT IN

80
 CRI



 100°



 6.7"



 2.95" ceiling depth


 100°

D10120UV | 20W | SMD LED | UGR19 Fixed Recessed Downlight w/ Adjustable CCT














 7.48"


 2.16"



Remote Driver Enclosure = 6" x 10" x 2"
 w/10' Standard Connecting Cable
 0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LIGHT COLOR	CCT	BEAM	LUMENS	FINISH	DRIVER	INPUT VOLTAGE
ENNEN	D10107UVW	20W	Daylight - Cool White - Warm White	6000K - 4000K - 3000K	100°	1500lm	WHITE	0-10V	120V - 277V





D10130UV | 30W | SMD LED | UGR19 Fixed Recessed Downlight w/ Adjustable CCT



Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LIGHT COLOR	CCT	BEAM	LUMENS	FINISH	DRIVER	INPUT VOLTAGE
ENNEN	D10107UVW	30W	Daylight - Cool White - Warm White	6000K - 4000K - 3000K	100°	2250lm	WHITE	0-10V	120V - 277V

