


FIBERLINES 301 FF

Fiberline 301 FF

IP20

Low-voltage linear lighting system designed for seamless installation between two floor surfaces. Featuring a black anodized aluminum profile with an anti-slip surface and 24V operation, Fiberlines 301 FF combines integrated illumination with a durable, low-profile design for aisles, theaters, auditoriums, and other commercial applications.

- Aisle lighting profiles
- Lineal light and dots light types
- 24V types and ADA compliant
- Black anodized profile with anti-slip polymer
- Ready made profiles or in components
- Applications: Cinemas, theatres, auditoriums, etc.

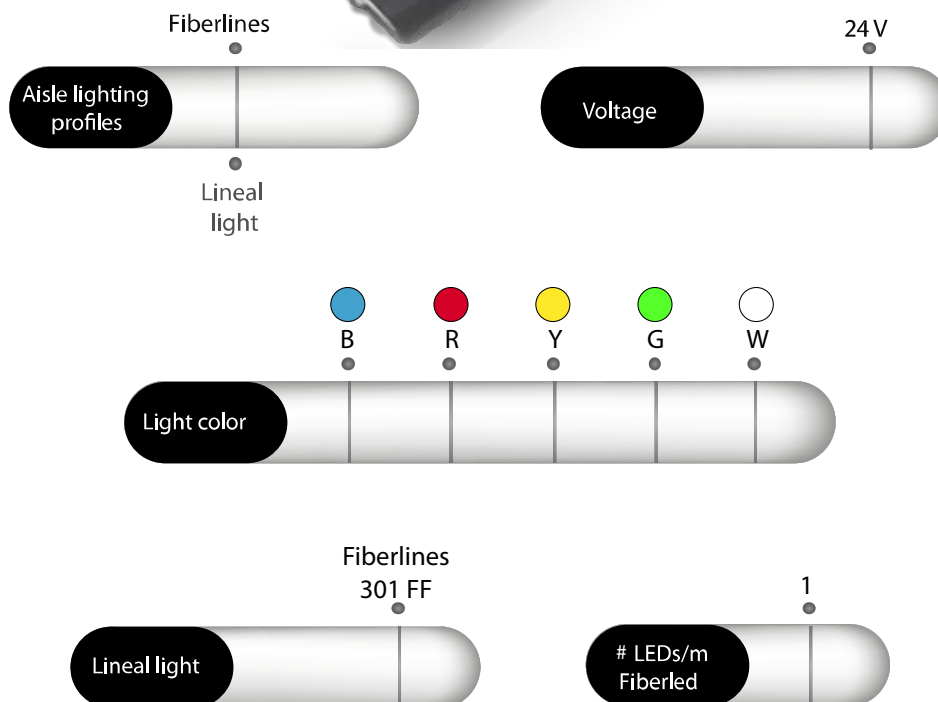

Date	
Customer	
Project	
Quantity	

AISLES PROFILES SPECIFICATIONS

IP20

24V DC




AL
Housing

ADA
Compliant



FIBERLINES

	Application	Measures (in)	Weight (lb/ft)	Nº of LEDs / m	W/m	Light color				
					24V					
Fiberlines 301 FF	floor/floor	2.96 x .87	5.28	1	0.5	x	x	x	x	x

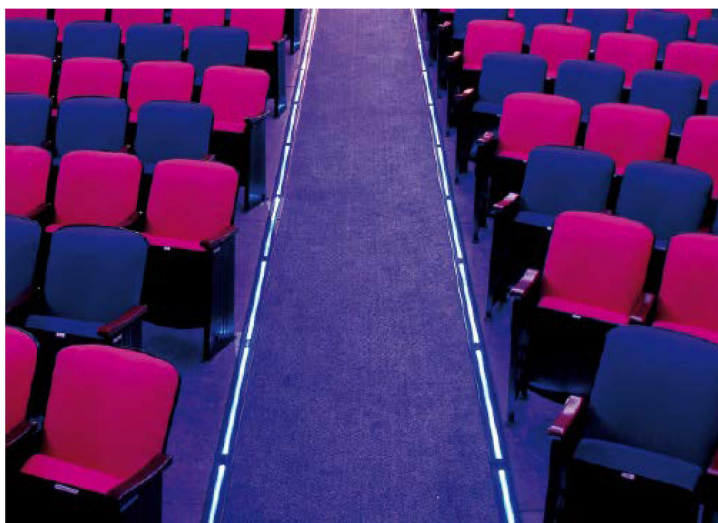


Fiberlines 301 FF

AISLES PROFILES

MEASURES STEP LIGHTING PROFILES

Fiberlines 301 FF

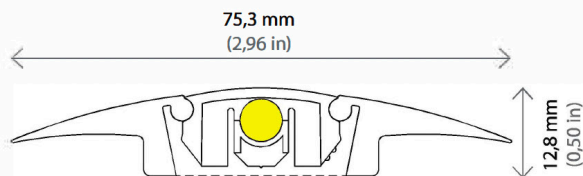

AISLES PROFILES

* COMPLETE READY SYSTEM - REFERENCES

Fiberlines 301 FF	24V	Standard	Black anodized profile with anti-slip surface (3.28ft) For installation and finishes between two floors	7030704/C..
-------------------	-----	----------	--	-------------



M130230/C13 WIRE-WAY wide endcap -2 per run