



DATE:

CUSTOMER:

PROJECT:

QUANTITY:

PLL25 *Round 22W / 39W / 75W / 164W LED Trimless Recessed Light*

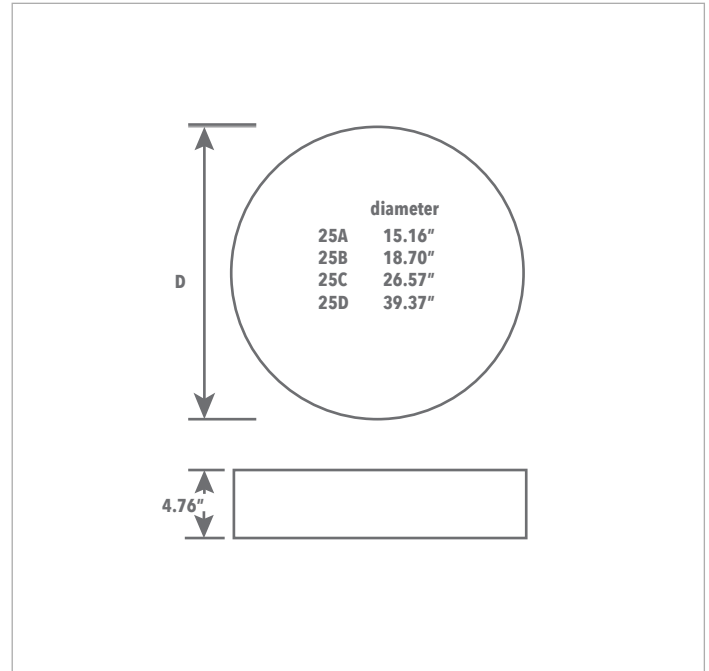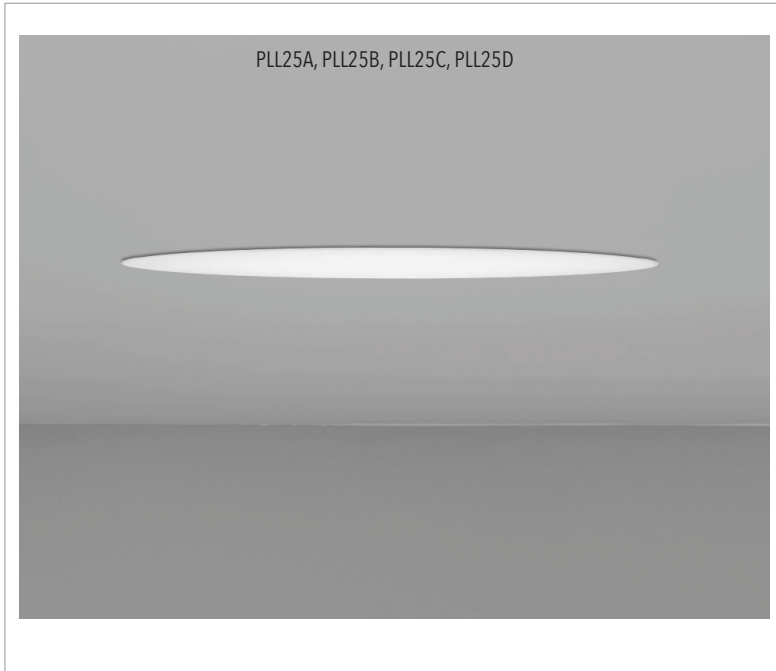

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	DIFFUSER	DRIVER	CRI	INPUT VOLTAGE
PLL25	PLL25A	22W	1890lm	30	O	N	80	120

													
---	---	---	---	---	---	---	---	---	--	---	--	--	--

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	DIFFUSER	DRIVER	CRI	INPUT VOLTAGE
PLL25								
	PLL25A	22W	1890lm	30 3000K	O Opal	N Non-Dim	80 CRI80	120 120V input
	PLL25B	39W	3570lm	40 4000K	P Prismatic	A 0-10V	90 *CRI90	277 277V input
	PLL25C	75W	8030lm			C Consult		
	PLL25D	164W	17640lm					

NOTES	<p>Recessed light field with round design and flush and trimless ceiling look for homogenous lighting and seamless integration in architecture projects, no UV and thermal emissions, sheet steel housing, adjustable ceiling thickness, mounting aids to be ordered separately, opal acrylic glass diffuser, easy plasterboard mounting via drywall screws, flush plastering of the luminaire is required, 5-pole terminal block, ballast (LED converter) integrated (with DALI dimming)</p>	<p>* CRI90 (subject to availability)</p>	WEB LINKS:
			<p>Product Page</p>