



DATE:

CUSTOMER:

PROJECT:

QUANTITY:

PLLAC.50P *Square 52W / 117W / 203W / 320W LED Full-Acrylic Pendant-Mounted Light*

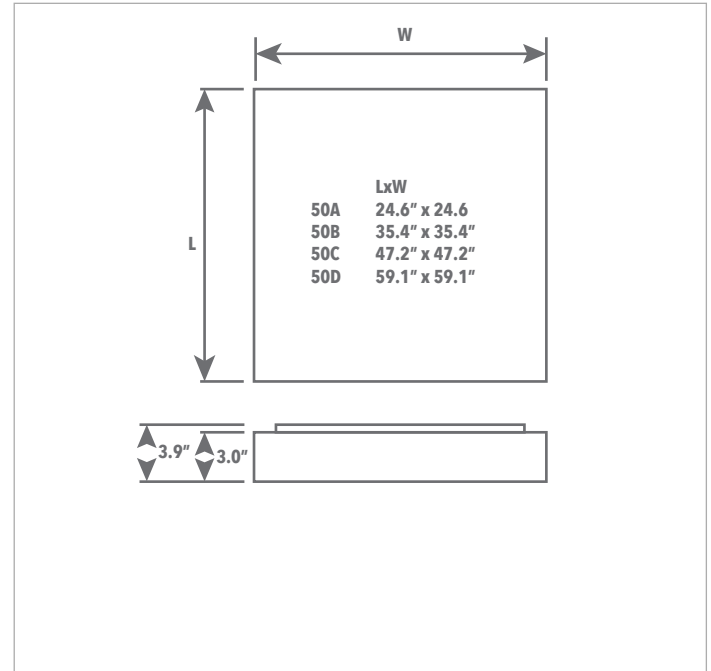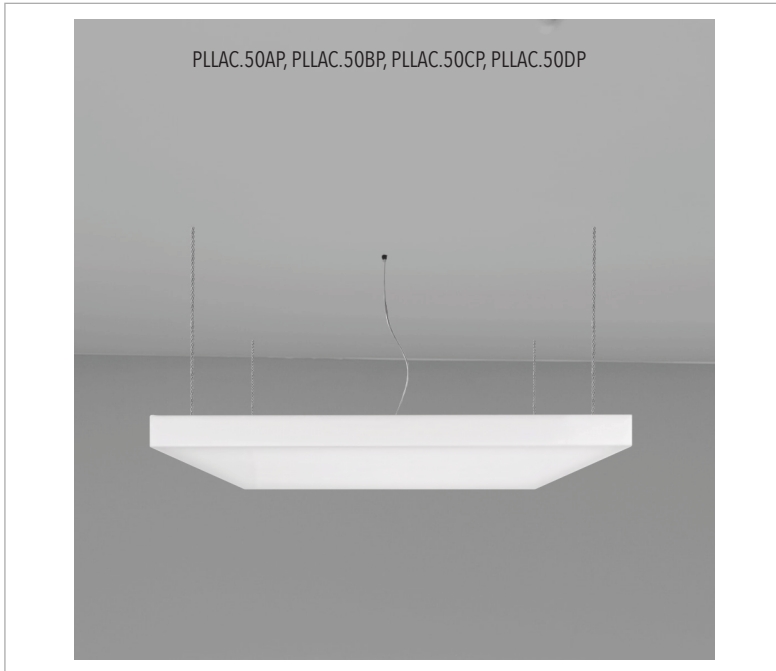

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	FINISH	DRIVER	CRI	INPUT VOLTAGE
PLLAC	PLLAC.50DP	320W	22000lm	30	A	A	80	120



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	FINISH	DRIVER	CRI	INPUT VOLTAGE	
PLLAC									
	PLLAC.50AP	52W	3650lm	30	3000K	A Full-Acrylic	N Non-Dim	80 CRI80	120 120V input
	PLLAC.50BP	117W	8400lm	40	4000K	A	0-10V	90 *CRI90	277 277V input
	PLLAC.50CP	203W	14000lm			C	Consult		
	PLLAC.50DP	320W	22000lm						

NOTES	Prestigious pendant luminaire in square design for homogenous lighting and balanced with round design for homogenous lighting and balanced room ambience, easy maintenance, no UV and thermal emissions, ceiling mounting plate and technique unit made from metal, wire-rope suspension to be ordered separately, pendant-rod suspension on request, opal-white acrylic diffuser (removable via lock fasteners), ceiling mounting via screwable plate, 5-pole terminal block, LED converter integrated.	* CRI90 (subject to availability)	WEB LINKS: Product Page