


DATE:

CUSTOMER:

PROJECT:


QUANTITY:

PLLAC.50P *Square 52W / 117W / 203W / 320W LED Full-Acrylic Pendant-Mounted Light*

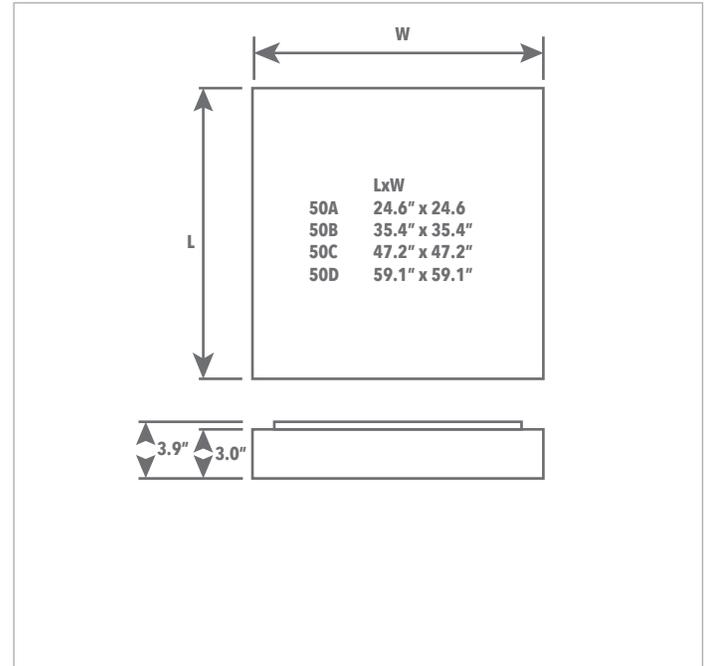

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	FINISH	DRIVER	CRI	INPUT VOLTAGE
PLLAC	PLLAC.50DP	290W	33650lm	30	A	A	80	120



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	FINISH	DRIVER	CRI	INPUT VOLTAGE
PLLAC								
	PLLAC.50AP	46.4W	5390lm	30	3000K	A Non-Dim	80	120
	PLLAC.50BP	104.4W	12120lm	40	4000K	A 0-10V	90	120V input
	PLLAC.50CP	185.6W	21540lm				*CRI90	277
	PLLAC.50DP	290W	33650lm					277V input

NOTES	Prestigious pendant luminaire in square design for homogenous lighting and balanced with round design for homogenous lighting and balanced room ambience, easy maintenance, no UV and thermal emissions, ceiling mounting plate and technique unit made from metal, wire-rope suspension to be ordered separately, pendant-rod suspension on request, opal-white acrylic diffuser (removable via lock fasteners), ceiling mounting via screwable plate, 5-pole terminal block, LED converter integrated.	* CRI90 (subject to availability)	WEB LINKS: Product Page