



DATE:

CUSTOMER:

PROJECT:

QUANTITY:

PLLMT.52XS *Square 52W / 112W / 197W LED Metal Trim Surface-Mounted Light*

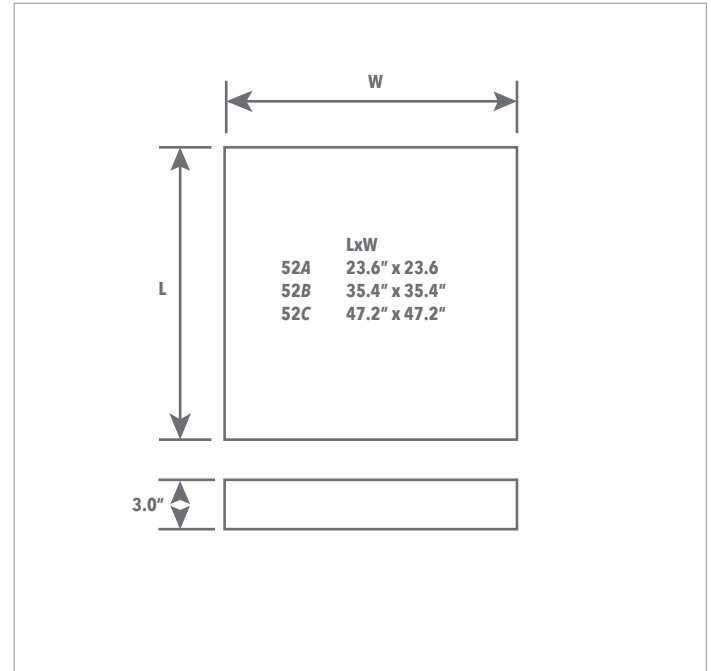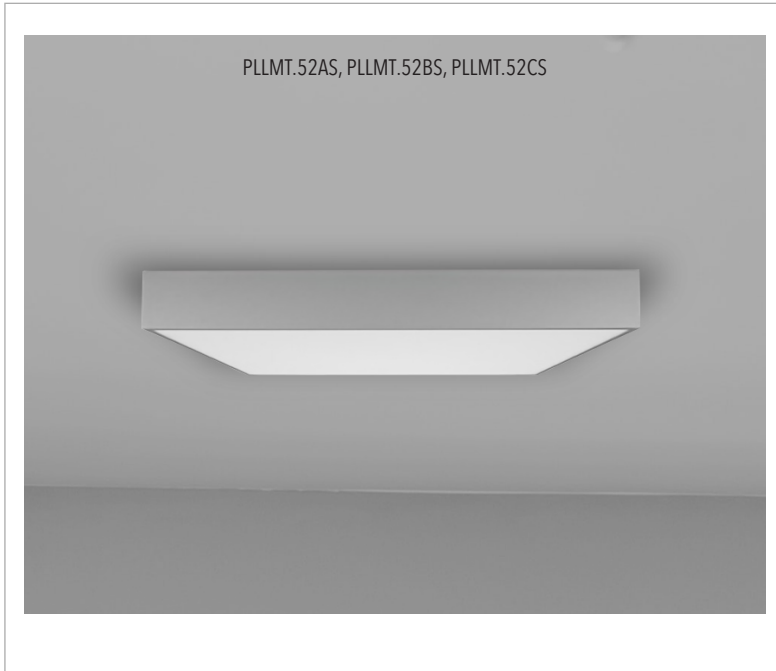

EXAMPLE:

| FAMILY | ITEM# | WATTAGE | LUMENS | CCT | DIFF. | FINISH | DRIVER | CRI | INPUT VOLTAGE |
|--------|------------|---------|--------|-----|-------|--------|--------|-----|---------------|
| PLLMT | PLLMT.52BS | 112W | 8400lm | 30 | P | S | N | 80 | 120 |



| FAMILY | ITEM# | WATTAGE | LUMENS | CCT | DIFFUSER | FINISH | DRIVER | CRI | INPUT VOLTAGE | |
|--------|------------|---------|---------|-----|----------|-------------|-----------|-----------|---------------|----------------|
| PLLMT | | | | | | | | | | |
| | PLLMT.52AS | 52W | 3540lm | 30 | 3000K | O Opal | S Silver | N Non-Dim | 80 CRI80 | 120 120V input |
| | PLLMT.52BS | 112W | 8400lm | 40 | 4000K | P Prismatic | W White | A 0-10V | 90 *CRI90 | 277 277V input |
| | PLLMT.52CS | 197W | 15000lm | | | | C Consult | | | |

| | | | |
|--------------|--|-----------------------------------|-------------------|
| NOTES | Prestigious surface-mounted with square design for homogenous and sophisticated architectural lighting, no UV and thermal emissions, metal housing, easy ceiling mounting, opal white diffuser made from UV and heat-resistant acrylic glass, 5-pole terminal block, LED converter integrated. | * CRI90 (subject to availability) | WEB LINKS: |
| | | | Product Page |