solavanti lighting

DATE:
CUSTOMER:
PROJECT:
QUANTITY:

PLL22 *Round 17.7W / 31.4W / 66.7W / 141.3W LED Metal Trim*

Surface-Mounted Or Pendant

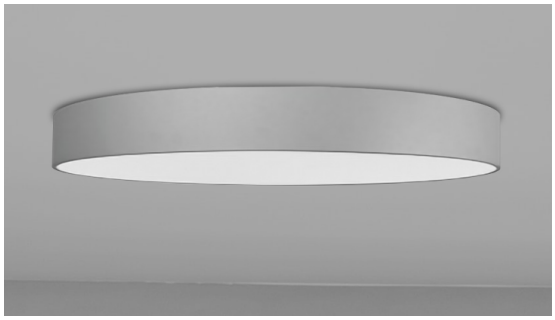

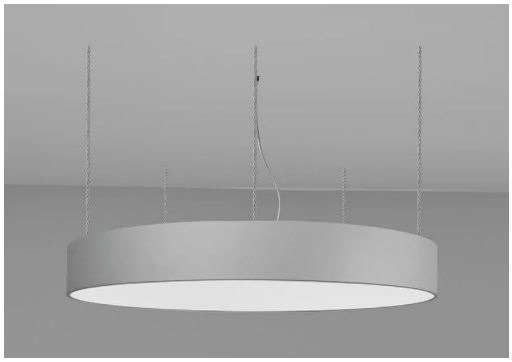



Intertek | LED BUILT IN | 80 CRI | DIMMABLE Consult Factory | IP 20 | 3-0/4-0 jbox mount

Driver is Universal 0-10V

PLL22		C

C= Ceiling
P= Pendant

FAMILY	PART#	Size	Watts/Lumens	CCT	Finish
	L633874	15.16"	17.7W/1920lm	3000K	Silver
	L633875	15.16"	17.7W/1920lm	3000K	White
	L642180	15.16"	17.7W/1920lm	3000K	Black
	L633876	15.16"	17.7W/1980lm	4000K	Silver
	L633877	15.16"	17.7W/1980lm	4000K	White
	L642182	15.16"	17.7W/1980lm	4000K	Black
	L633882	18.70"	31.4W/3380lm	3000K	Silver
	L633883	18.70"	31.4W/3380lm	3000K	White
	L642184	18.70"	31.4W/3380lm	3000K	Black
	L633884	18.70"	31.4W/3490lm	4000K	Silver
	L633885	18.70"	31.4W/3490lm	4000K	White
	L642186	18.70"	31.4W/3490lm	4000K	Black
	L633890	26.57"	66.7W/7130lm	3000K	Silver
	L633891	26.57"	66.7W/7130lm	3000K	White
	L642188	26.57"	66.7W/7130lm	3000K	Black
	L633892	26.57"	66.7W/7350lm	4000K	Silver
	L633893	26.57"	66.7W/7350lm	4000K	White
	L642190	26.57"	66.7W/7350lm	4000K	Black
	L633900	39.37"	141.3W/16990lm	3000K	Silver
	L633901	39.37"	141.3W/16990lm	3000K	White
	L642176	39.37"	141.3W/16990lm	3000K	Black
	L633902	39.37"	141.3W/17500lm	4000K	Silver
	L633903	39.37"	141.3W/17500lm	4000K	White
	L642178	39.37"	141.3W/17500lm	4000K	Black

NOTES

Prestigious round design for homogenous and sophisticated architectural lighting, no UV and thermal emissions, metal housing, easy ceiling mounting, opal white diffusor made from UV and heat-resistant acrylic glass, 5-pole terminal block, LED converter integrated.

WEB LINKS: