

DATE:



CUSTOMER:

PROJECT:

QUANTITY:

PLL50 *Square 46.4W / 104.4W / 185.6W / 290W LED Full-Acrylic*

Surface-Mounted or Pendant

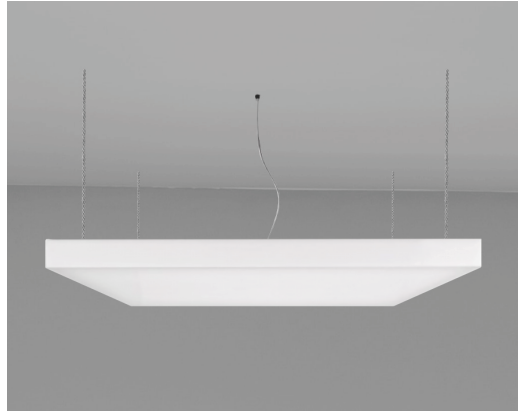

FAMILY	PART#	Size	Watts/Lumens	Temp
PLL50	<input type="text"/>			
				C= Ceiling P= Pendant Driver is Universal 0-10V
	L634098	24.6" x 24.6"	46.4W/5210lm	3000K
	L634099	24.6" x 24.6"	46.4W/5390lm	4000K
	L639100	35.4" x 35.4"	104.4W/11700lm	3000K
	L639101	35.4" x 35.4"	104.4W/12120lm	4000K
	L634096	47.2" x 47.2"	185.6W/20790lm	3000K
	L634097	47.2" x 47.2"	185.6W/21540lm	4000K
	L639102	59.1" x 59.1"	290.0W/32480lm	3000K
	L639103	59.1" x 59.1"	290.0W/33650lm	4000K

NOTES	<p>Prestigious luminaire in square design for homogenous lighting and balanced room ambience, easy maintenance, no UV and thermal emissions, ceiling mounting plate and technique unit made from metal, wire-rope suspension to be ordered separately, pendant-rod suspension on request, opal-white acrylic diffuser (removable via lock fasteners), ceiling mounting via screwable plate, 5-pole terminal block, LED converter integrated.</p>	WEB LINKS:
--------------	--	-------------------