



LICHTKANAL 070


Lighting System (Indoor Ceiling Recessed - IP20)

date	
customer	
project	
quantity	

LICHTKANAL is available in several variations. The diffuser is in form of different acrylic profiles for various lighting tasks. All Lichtkanal sizes are characterized by their continuously illuminated surface. Individual solutions, e.g. wall-ceiling or wall-edge solutions can be designed.


- acrylic diffuser profile with snap-in technique
- highest-quality aluminum profile
- various suspension systems available as accessories

LK070 Indoor Recessed Ceiling

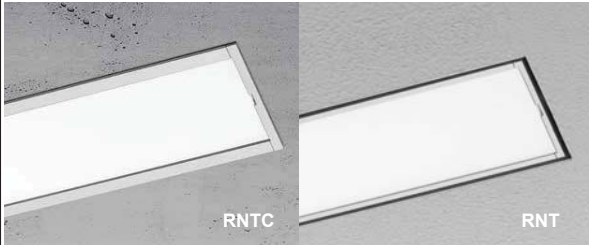

[Click here for LK045 Indoor Recessed Ceiling](#)

[Click here for LK45 Indoor Ceiling Surface](#)




[Click here for LK70 Indoor Ceiling Surface](#)

[Click here for LK45 Indoor Ceiling Pendant](#)



[Click here for LK70 Indoor Ceiling Pendant](#)

[Click here for LK45 Indoor Wall Surface](#)



[Click here for LK70 Indoor Wall Surface](#)


example...



Family	Profile size	Mounting	Insert CCT	Performance	Finish	Driver	Input voltage	Run Length in ft.
LK	LK070	RTC	40	RO	S	A	U	12

Family	Profile size	Mounting		Insert CCT		Performance		Finish		Driver		Input voltage		Lgth (ft.)
LK														
LK70	70mm (2.76")	RT	recess with trim - for drywall	27	2700K	LO	5W /500lm/ft	S	silver	N	non-dim	120	120V	
		RNT	recess w/out trim - for drywall	30	3000K	RO	7W /1000lm/ft	B	black	A	0-10V	277	277V	
		RTC	recess with trim - for concrete	35	3500K	HO	11W /1500lm/ft	W	white			U	universal	
		RNTC	recess w/out trim - for concrete	40	4000K	VHO	15W /2000lm/ft							

Notes: *4" is the smallest length for all sizes

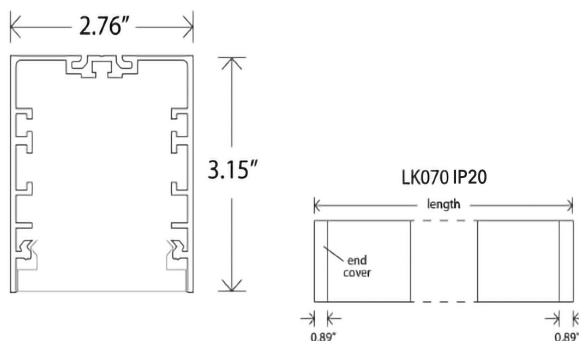

Light Distribution Options For All LK Versions

