



date

customer

project

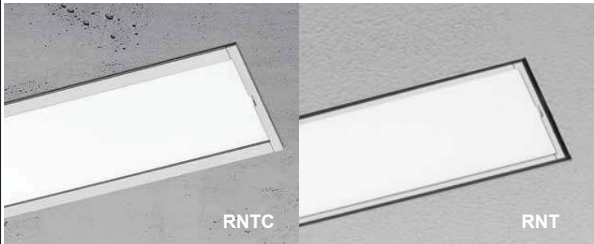



quantity

LICHTKANAL 070

Lighting System (Indoor Ceiling Recessed - IP20)

LICHTKANAL is available in several variations. The diffuser is in form of different acrylic profiles for various lighting tasks. All Lichtkanal sizes are characterized by their continuously illuminated surface. Individual solutions, e.g. wall-ceiling or wall-edge solutions can be designed.

- acrylic diffuser profile with snap-in technique
- highest-quality aluminum profile
- various suspension systems available as accessories

<h3>LK070 Indoor Recessed Ceiling</h3>  <p>Click here for LK070 Outdoor Recessed Ceiling</p> <p>Click here for LK045 Indoor Recessed Ceiling</p>	<p>Click here for LK45 Indoor Ceiling Surface</p>  <p>Click here for LK70 Indoor Ceiling Surface</p>	<p>Click here for LK45 Indoor Ceiling Pendant</p>  <p>Click here for LK70 Indoor Ceiling Pendant</p>	<p>Click here for LK45 Indoor Wall Surface</p>  <p>Click here for LK70 Indoor Wall Surface</p>
	<p>Click here for LK70 Outdoor Ceiling Surface</p>	<p>Click here for LK70 Outdoor Ceiling Pendant</p>	<p>Click here for LK70 Outdoor Wall Surface</p>

example...



Family	Profile size	Mounting	Insert CCT	Performance	Finish	Driver	Input voltage	Run Length in ft.
LK	LK070	RST	40	L	S	A	U	12

Family	Profile size	Mounting	Insert CCT	Performance	Finish	Driver	Input voltage	Run Length in ft.
LK	LK70 70mm (2.76")	RT recess with trim - for drywall RNT recess w/out trim - for drywall RTC recess with trim - for concrete RNTC recess w/out trim - for concrete	27 2700K 30 3000K 35 3500K 40 4000K	L 1100 _{lm/ft}	S silver B black W white	N non-dim A 0-10V	120 120V 277 277V U universal	

Notes: *4' is the smallest length for all sizes

