

DATE:



CUSTOMER:

PROJECT:

QUANTITY:

VIARECTA-D/I

D38150BUW, D38150BUB
40W UGR17 Linear system for direct/indirect surface pendant

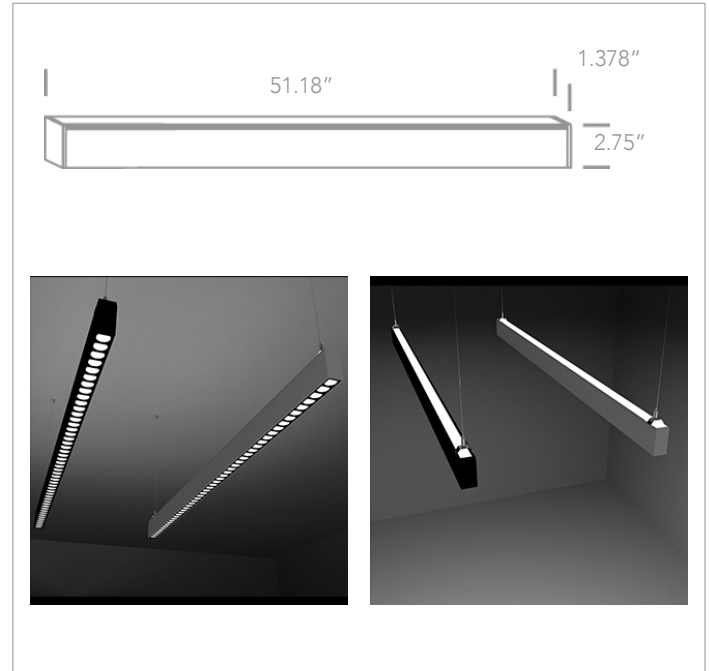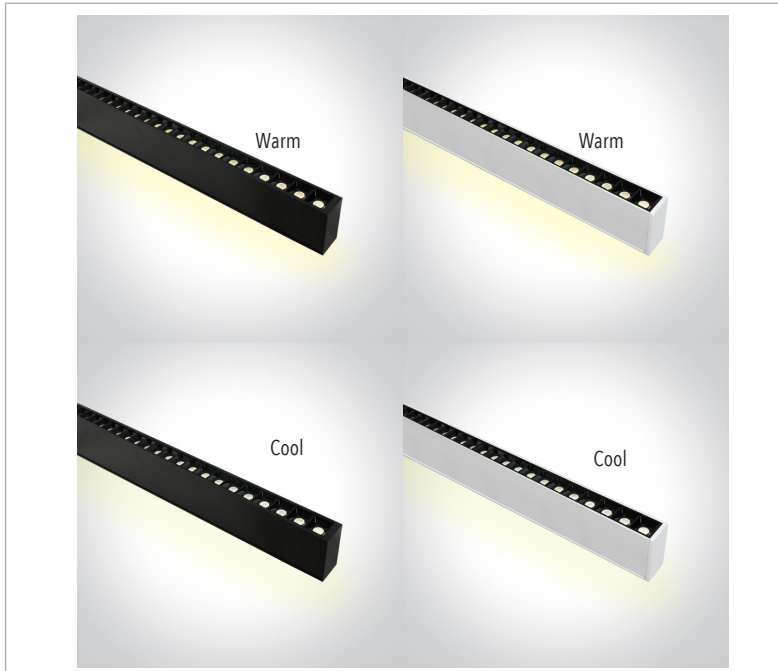

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
VIARECTA	D38150CBC	40W	38/18	40	34/120	B	A	20	120



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
VIARECTA									
	D38150BUWC	40W	38/18 3800lm/1800lm	40 4000K	34/120 34°/120°	W WHITE	A 0-10V	20 IP20	120/277 120V - 277V
	D38150BUWW	40W	38/18 3800lm/1800lm	30 3000K	34/120 34°/120°	W WHITE	A 0-10V	20 IP20	120/277 120V - 277V
	D38150BUBC	40W	38/18 3800lm/1800lm	40 4000K	34/120 34°/120°	B BLACK	A 0-10V	20 IP20	120/277 120V - 277V
	D38150BUBW	40W	38/18 3800lm/1800lm	30 3000K	34/120 34°/120°	B BLACK	A 0-10V	20 IP20	120/277 120V - 277V

NOTES	CCT: 3000K CCT = Warm White 4000K CCT = Cool White	WEB LINKS: