

DATE:

CUSTOMER:


PROJECT:

QUANTITY:

# LUCI-SCAFFELE *D38110, D38105, D38103, D38101, D38102*

*Easy-connect 3W, 5W, and 10W LED Shelf-Lighting System.*

IP20

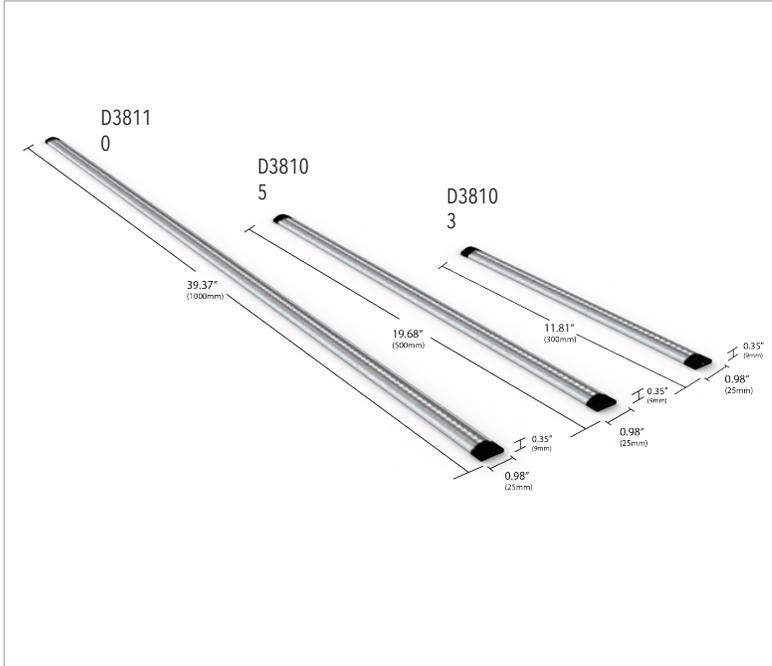

EXAMPLE:

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
LUCISCAF	D38110	10W	750lm	30	90	A	A	20	120

**PROFILE SEGMENTS**

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
LUCISCAF									
	D38110	10W	750lm	30 3000K	90 90°	A Aluminum	A 0-10V	20 IP20	120/277 120V - 277V
	D38105 *	5W	375lm						
	D38103 *	3W	225lm						

**ACCESSORIES**

FAMILY	ITEM#	DESCRIPTION	QTY
LUCISCAF			
	D38101A **	<b>Straight LED Segment Connector</b>	
	D38101B **	<b>Corner LED Segment Connector</b>	
	D38101C	<b>Cable Connector</b>	
	D38101D	<b>8-Way Connection Box</b>	
	D38102A	<b>Touch On/Off, Hold-Dim Power Switch</b>	
	D38102B	<b>Wave/Door-Sensor On/Off Power Switch</b>	
	D38102C	<b>Wave-Sensor On/Off Power Switch</b>	

<b>NOTES</b>	* No-dim under 10W	<b>CCT:</b> 3000K CCT = Warm White	<b>WEB LINKS:</b>  D38103 D38105 D38110
	** Maximum 60W per run Driver in remote enclosure		

