



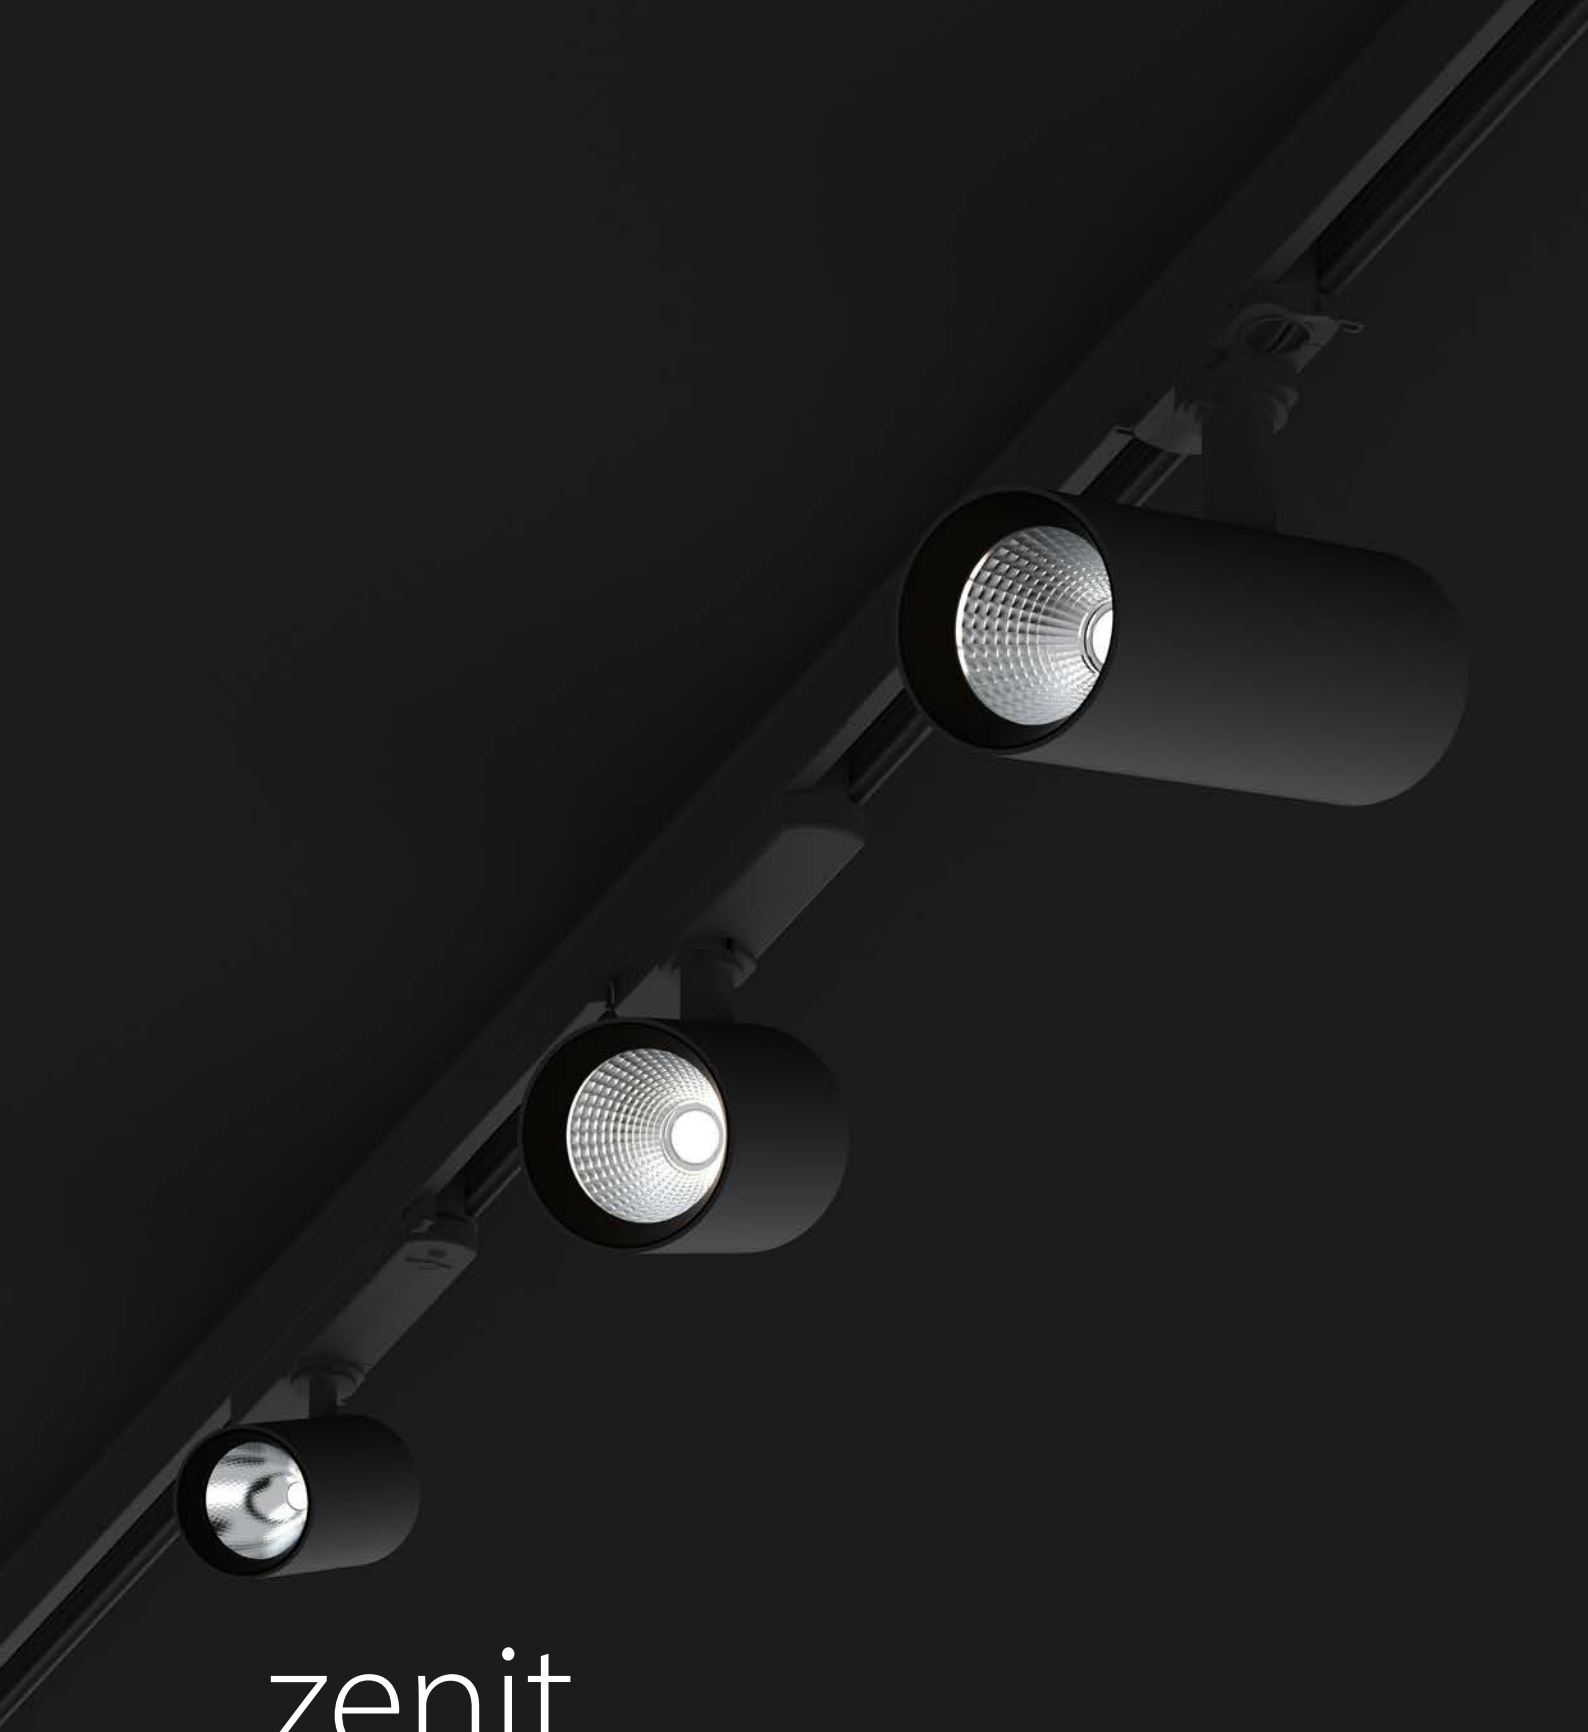


zenit

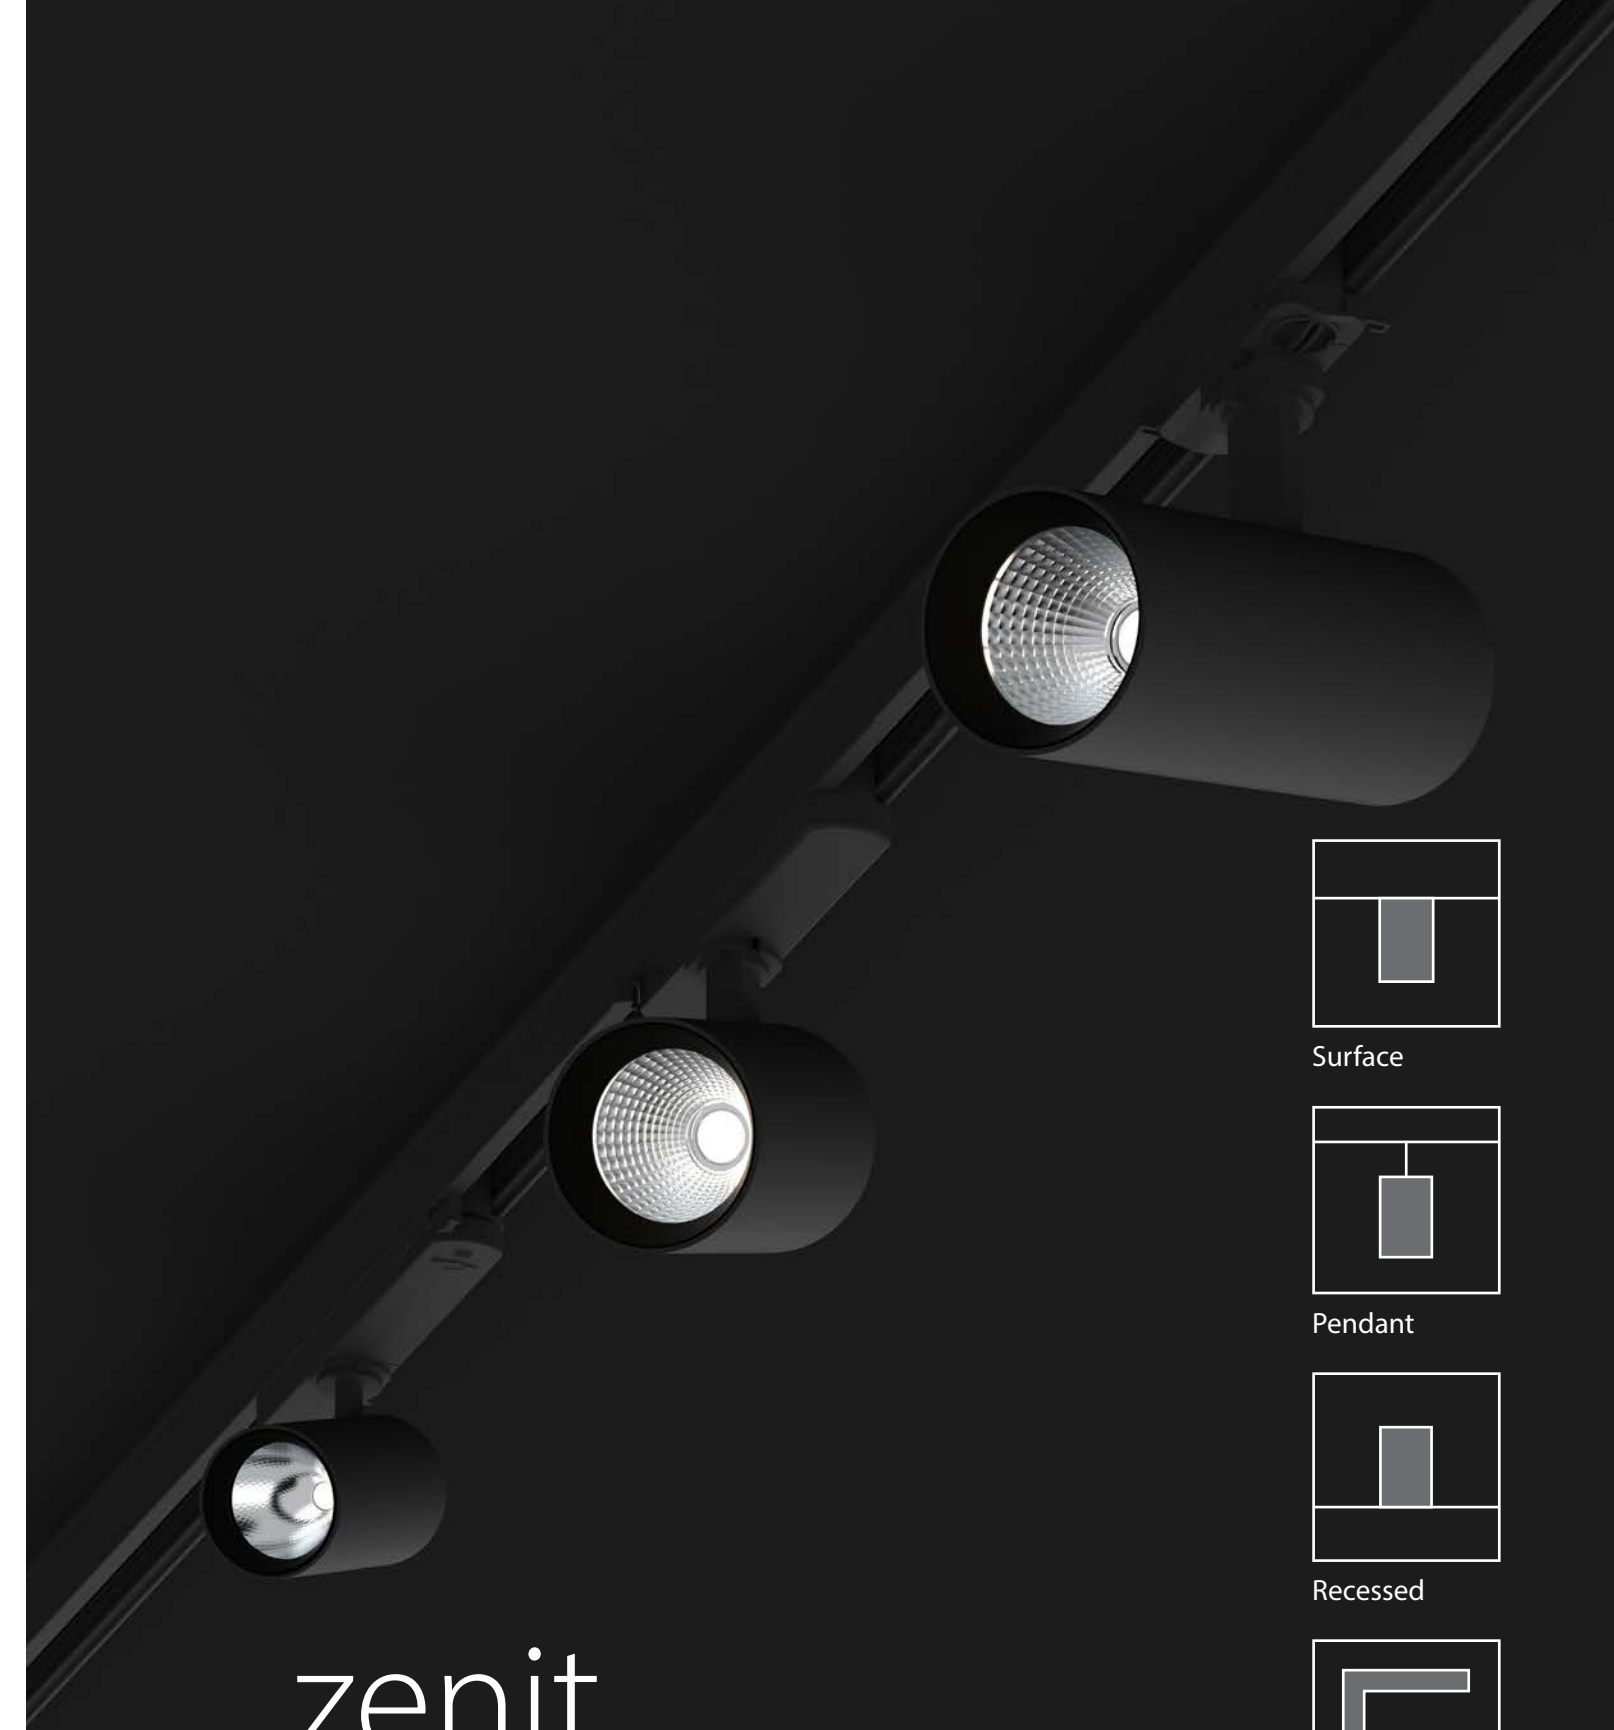


zenit

DESIGNER'S


SPOTLIGHT FAMILY



Surface




Pendant



Recessed



Systems



Track



ZENIT - DESIGNER'S SPOTLIGHT FAMILY

Inspiration



WÜRTH MODYF KÜNZELSAU | GERMANY

Product: zenit M



zenit M with surface baldachin

zenit M high output
with universal adapter



zenit M recessed mounted, fixed version




zenit M recessed mounted, swivelling version



TUBE COLORS

zenit M recessed mounted, flip version

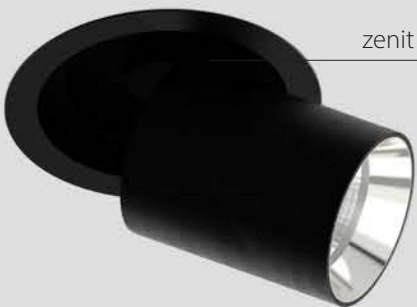

zenit M surface mounted downlight



zenit M high output



zenit M suspended downlight



black matte 9005 (SW)



high-gloss silver (BB)



silver matte (PP)



high-gloss black chrome (ZZ)



high-gloss copper (KK)



capital copper (RR)



high-gloss gold (GG)



glaring gold (DD)



gunnery grey (YY)



ZENIT M
ONE SPOTLIGHT, SO MANY OPTIONS!

zenit M

Surface luminaire



1 TUBE COLOR

black matte (RAL 9005)

high-gloss silver

silver matte

high-gloss black chrome

high-gloss copper

capital copper

high-gloss gold

glaring gold

gunnery grey

SW

BB

PP

ZZ

KK

RR

GG

DD

YY

2 HOUSING COLOR

white

black

RAL of your choice

WS

SW

3 LED

3000 K, CRI > 80

4000 K, CRI > 80

2700 K, CRI > 90

3000 K, CRI > 90

3500 K, CRI > 90

4000 K, CRI > 90

830

840

927

930

935

940

4 OUTPUT

high output

5 CONTROL

0-10V dimming

6 REFLECTOR

23°

40°

60°

2

4

6

ZENIT M | SURFACE

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	high output / 17 - 18.5 W		
	23°	40°	60°
LF830 3000 K	2086 lm	2090 lm	1980 lm
LF840 4000 K	2147 lm	2151 lm	2038 lm
LF927 2700 K	1634 lm	1637 lm	1551 lm
LF930 3000 K	2109 lm	2113 lm	2002 lm
LF935 3500 K	2167 lm	2171 lm	2057 lm
LF940 4000 K	2222 lm	2227 lm	2110 lm

OPTIONAL ACCESSORY

Honeycomb glare protection	S10-BLE-80
Refractor for elliptical distribution	S10-OZL-80
Clear protective glass	S10-SGL-80
Diffuser protection glass	S10-WGL-80
Passive	
Replacement of the reflector without the use of any tool . Passive cooling.	

8

9

zenit M

Pendant downlight



1 TUBE COLOR

black matte (RAL 9005)

high-gloss silver

silver matte

high-gloss black chrome

high-gloss copper

capital copper

high-gloss gold

glaring gold

gunnery grey

SW

BB

PP

ZZ

KK

RR

GG

DD

YY

2 HOUSING COLOR

white

black

RAL of your choice

SW

SW

3 LED

3000 K, CRI > 80

4000 K, CRI > 80

2700 K, CRI > 90

3000 K, CRI > 90

3500 K, CRI > 90

4000 K, CRI > 90

830

840

927

930

935

940

4 OUTPUT

high output

5 CONTROL

0-10V dimming

6 REFLECTOR

23°

40°

60°

2

4

6

10

ZENIT M | PENDANT

Weight
2.2 lbs

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	high output / 17 - 18.5 W		
	23°	40°	60°
LF830 3000 K	2086 lm	2090 lm	1980 lm
LF840 4000 K	2147 lm	2151 lm	2038 lm
LF927 2700 K	1634 lm	1637 lm	1551 lm
LF930 3000 K	2109 lm	2113 lm	2002 lm
LF935 3500 K	2167 lm	2171 lm	2057 lm
LF940 4000 K	2222 lm	2227 lm	2110 lm

OPTIONAL ACCESSORY


Honeycomb glare protection	S10-BLE-80
Refractor for elliptical distribution	S10-OZL-80
Clear protective glass	S10-SGL-80
Diffuser protection glass	S10-WGL-80

Passive
Replacement of the reflector without the use of any tool . Passive cooling.

11

zenit M fixed

Recessed luminaire

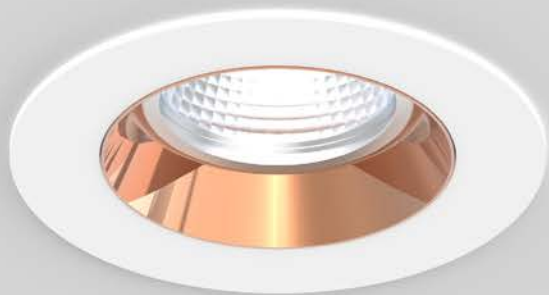

1 TUBE COLOR

- black matte (RAL 9005)
- high-gloss silver
- silver matte
- high-gloss black chrome
- high-gloss copper
- capital copper
- high-gloss gold
- glaring gold
- gunnery grey

SW
BB
PP
ZZ
KK
RR
GG
DD
YY

2 HOUSING COLOR

- white
- black
- RAL of your choice

WS
SW
☛

3 LED

- | | |
|------------------|-----|
| 3000 K, CRI > 80 | 830 |
| 4000 K, CRI > 80 | 840 |
| 2700 K, CRI > 90 | 927 |
| 3000 K, CRI > 90 | 930 |
| 3500 K, CRI > 90 | 935 |
| 4000 K, CRI > 90 | 940 |

4 OUTPUT

- high output

H

5 CONTROL




- 0-10V dimming

3

6 REFLECTOR

- | | |
|-----|---|
| 23° | 2 |
| 40° | 4 |
| 60° | 6 |

ZENIT M | RECESSED

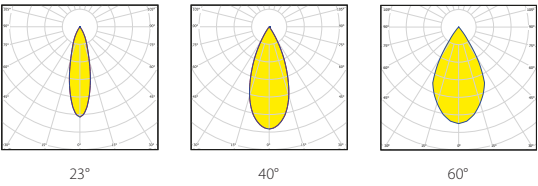

LUMINOUS FLUX (LM) / SYSTEM POWER (W) / BASED ON TUBE COLOR BLACK MATTE (NN)

	high output / 17.5 - 19 W		
	23°	40°	60°
LF830 3000 K	2086 lm	2090 lm	1980 lm
LF840 4000 K	2147 lm	2151 lm	2038 lm
LF927 2700 K	1634 lm	1637 lm	1551 lm
LF930 3000 K	2109 lm	2113 lm	2002 lm
LF935 3500 K	2167 lm	2171 lm	2057 lm
LF940 4000 K	2222 lm	2227 lm	2110 lm

OPTIONAL ACCESSORY

Honeycomb glare protection	S10-BLE-80
Refractor for elliptical distribution	S10-OZL-80
Clear protective glass	S10-SGL-80
Diffuser protection glass	S10-WGL-80

Passive
Replacement of the reflector without the use of any tool . Passive cooling.

zenit M swivelling

Recessed luminaire



1 TUBE COLOR

black matte (RAL 9005)

high-gloss silver

silver matte

high-gloss black chrome

high-gloss copper

capital copper

high-gloss gold

glaring gold

gunnery grey

SW

BB

PP

ZZ

KK

RR

GG

DD

YY

2 HOUSING COLOR

white

black

RAL of your choice

SW

SW

3 LED

3000 K, CRI > 80

4000 K, CRI > 80

2700 K, CRI > 90

3000 K, CRI > 90

3500 K, CRI > 90

4000 K, CRI > 90

830

840

927

930

935

940

4 OUTPUT

high output

5 CONTROL

H

6 REFLECTOR

23°

40°

60°

2

4

6

ZENIT M | RECESSED

LUMINOUS FLUX (LM) / SYSTEM POWER (W) / BASED ON TUBE COLOR BLACK MATTE (NN)

	high output / 17.5 - 19 W		
	23°	40°	60°
LF830 3000 K	2086 lm	2090 lm	1980 lm
LF840 4000 K	2147 lm	2151 lm	2038 lm
LF927 2700 K	1634 lm	1637 lm	1551 lm
LF930 3000 K	2109 lm	2113 lm	2002 lm
LF935 3500 K	2167 lm	2171 lm	2057 lm
LF940 4000 K	2222 lm	2227 lm	2110 lm

OPTIONAL ACCESSORY

Honeycomb glare protection	S10-BLE-80
Refractor for elliptical distribution	S10-OZL-80
Clear protective glass	S10-SGL-80
Diffuser protection glass	S10-WGL-80


Passive
Replacement of the reflector without the use of any tool . Passive cooling.

14

15

zenit M flip

Recessed luminaire

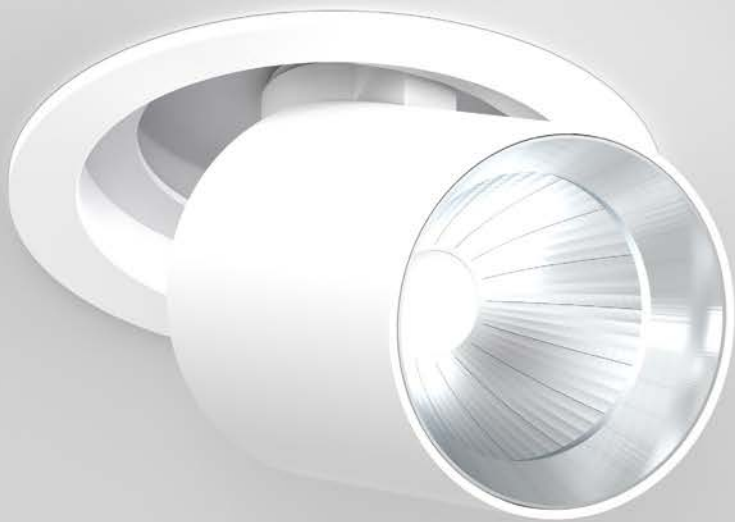

1 TUBE COLOR

black matte (RAL 9005)

high-gloss silver

silver matte

high-gloss black chrome

high-gloss copper

capital copper

high-gloss gold

glaring gold

gunnery grey

2 HOUSING COLOR

SWwhite

BBblack

PPRAL of your choice

ZZRAL

KK

RR

GG

DD

YY

3 LED

WS3000 K, CRI > 80830

SW4000 K, CRI > 80840

2700 K, CRI > 90927

3000 K, CRI > 90930

3500 K, CRI > 90935

4000 K, CRI > 90940

4 OUTPUT

high output

5 CONTROL

H0-10V dimming

6 REFLECTOR

323°2

440°4

660°6

ZENIT M | RECESSED

23°

40°

60°

23°

40°

60°

Weight

2.425 lbs

CUT OUT

ø DIAMETER

ø 5.11"

↑ DEPTH

7.12"

Ø5.518"

6.73"

359°

70°

4.06"

Ø3.14"

LUMINOUS FLUX (LM) / SYSTEM POWER (W) / BASED ON TUBE COLOR BLACK MATTE (NN)

	high output / 17.5 - 19 W		
	23°	40°	60°
LF830 3000 K	2086 lm	2090 lm	1980 lm
LF840 4000 K	2147 lm	2151 lm	2038 lm
LF927 2700 K	1634 lm	1637 lm	1551 lm
LF930 3000 K	2109 lm	2113 lm	2002 lm
LF935 3500 K	2167 lm	2171 lm	2057 lm
LF940 4000 K	2222 lm	2227 lm	2110 lm

OPTIONAL ACCESSORY

Honeycomb glare protection	S10-BLE-80
Refractor for elliptical distribution	S10-OZL-80
Clear protective glass	S10-SGL-80
Diffuser protection glass	S10-WGL-80

Passive
Replacement of the reflector without the use of any tool . Passive cooling.

16

17



1 TUBE COLOR

gold

black

2 HOUSING COLOR

GD white

SW black

3 LED

WS 3000 K, CRI > 80830

SW 4000 K, CRI > 80840

2700 K, CRI > 90927

3000 K, CRI > 90930

3500 K, CRI > 90935

4000 K, CRI > 90940

4 OUTPUT

high output

5 CONTROL


H 0-10V dimming

6 BEAM

16°1

23°2

40°4

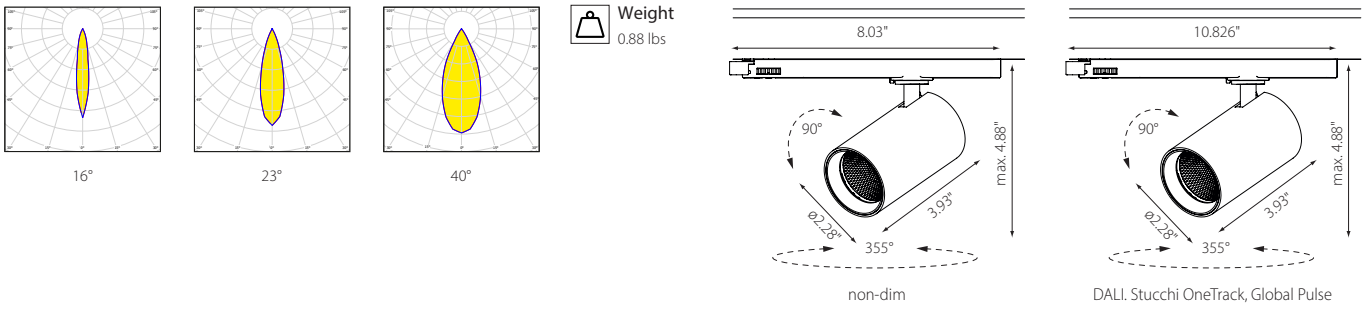

Replacement of the reflector without any tool.


Passive cooling.
Complete spotlight including reflector and converter.

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	high output (11 W)					
	16°		23°		40°	
	gold	black	gold	black	gold	black
LF830 3000 K	1161 lm	1127 lm	1112 lm	1079 lm	1088 lm	1056 lm
LF840 4000 K	1217 lm	1181 lm	1172 lm	1138 lm	1139 lm	1106 lm
LF927 2700 K	913 lm	887 lm	881 lm	855 lm	862 lm	837 lm
LF930 3000 K	933 lm	906 lm	903 lm	877 lm	878 lm	852 lm
LF935 3500 K	987 lm	958 lm	952 lm	924 lm	925 lm	898 lm
LF940 4000 K	988 lm	960 lm	943 lm	916 lm	921 lm	895 lm

OPTIONAL ACCESSORY

Honeycomb glare protection	S10-BLE-80
Refractor for elliptical distribution	S10-OZL-80
Clear protective glass	S10-SGL-80
Diffuser protection glass	S10-WGL-80

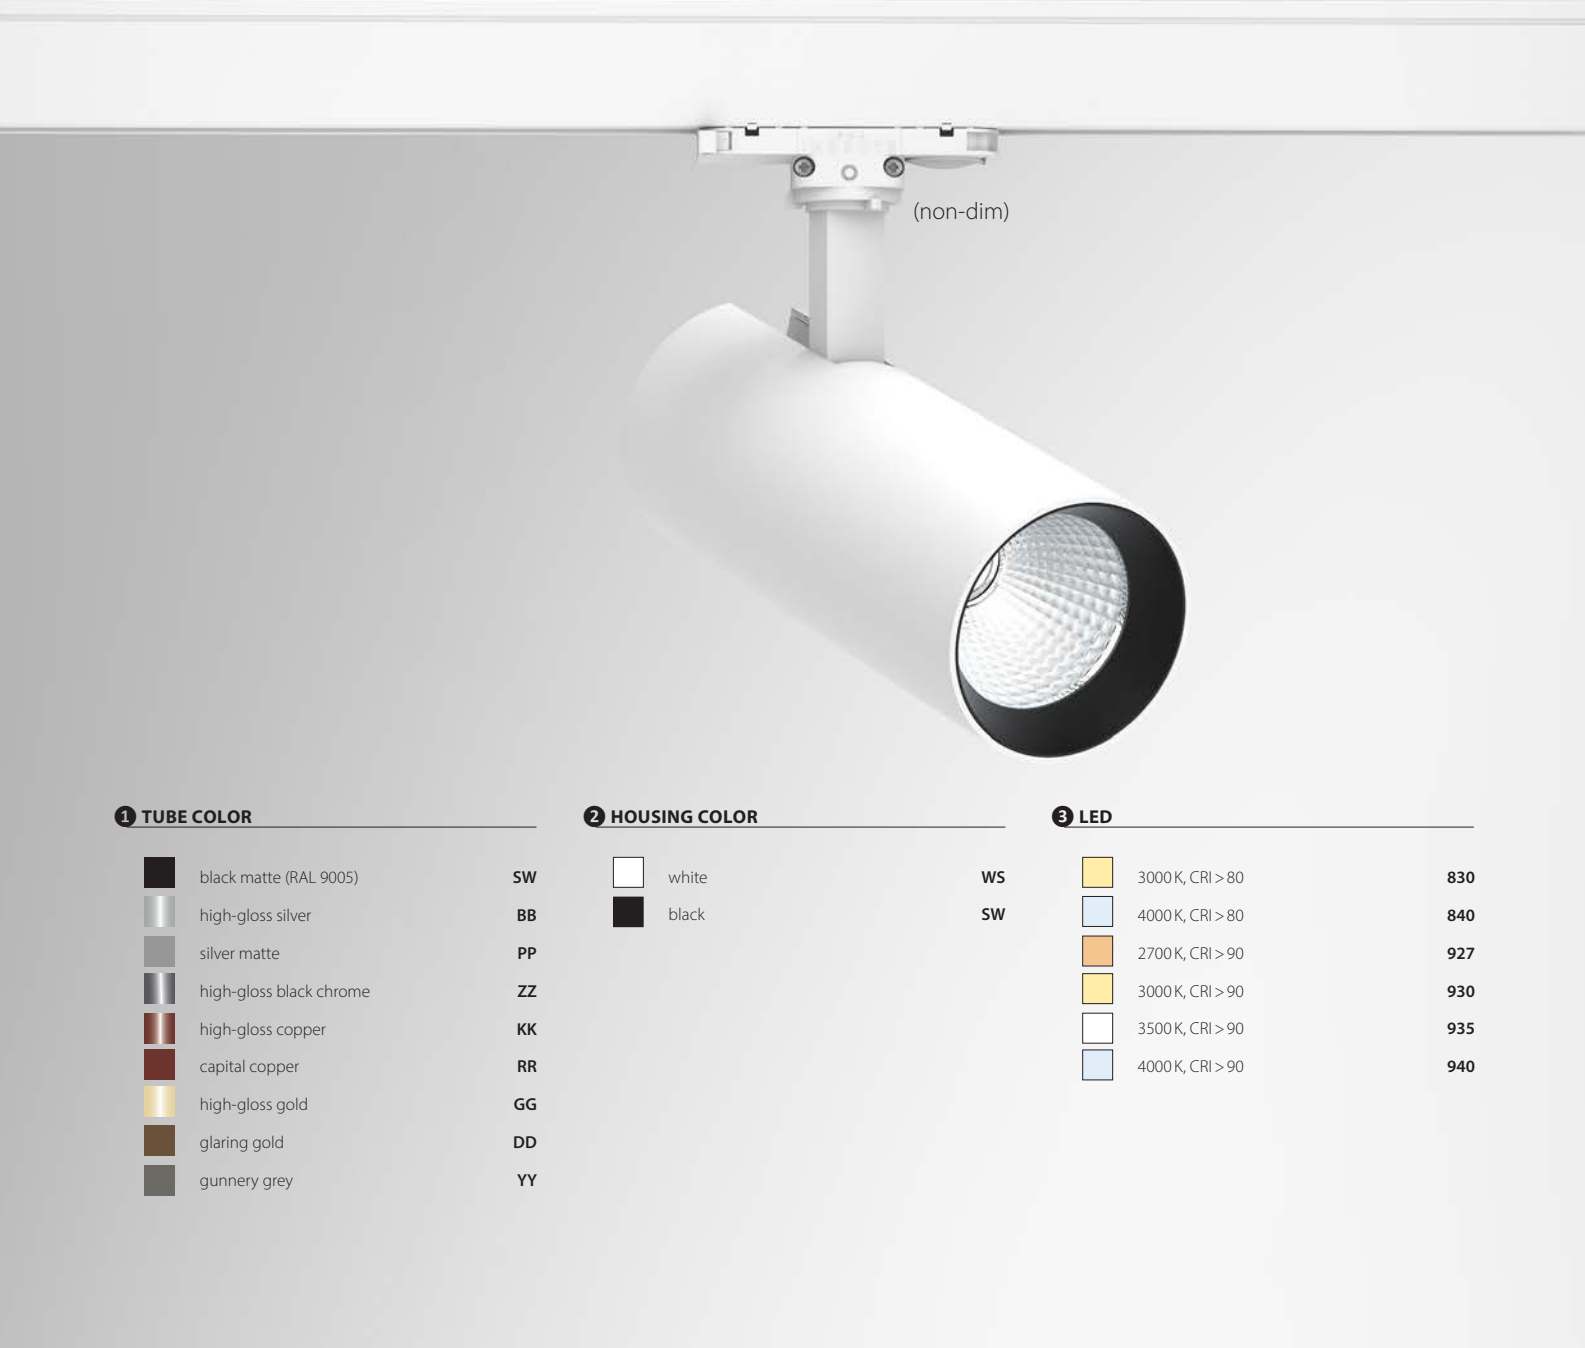

1 TUBE COLOR

black matte (RAL 9005)

high-gloss silver

silver matte

high-gloss black chrome

high-gloss copper

capital copper

high-gloss gold

glaring gold

gunnery grey

2 HOUSING COLOR

SW white

BB black

PP

ZZ

KK

RR

GG

DD

YY

3 LED

WS 3000 K, CRI > 80 830

SW 4000 K, CRI > 80 840

2700 K, CRI > 90 927

3000 K, CRI > 90 930

3500 K, CRI > 90 935

4000 K, CRI > 90 940

4 OUTPUT

high output

5 CONTROL

H 0-10V dimming

6 REFLECTOR

3 23° 2

40° 4

60° 6

20

ZENIT M | TRACK

Replacement of the reflector without any tool.

Passive cooling.

Complete spotlight including reflector and converter.

LUMINOUS FLUX (LM) / SYSTEM POWER (W)

	high output / 17 - 18.5 W		
	23°	40°	60°
LF830 3000 K	2086 lm	2090 lm	1980 lm
LF840 4000 K	2147 lm	2151 lm	2038 lm
LF927 2700 K	1634 lm	1637 lm	1551 lm
LF930 3000 K	2109 lm	2113 lm	2002 lm
LF935 3500 K	2167 lm	2171 lm	2057 lm
LF940 4000 K	2222 lm	2227 lm	2110 lm

OPTIONAL ACCESSORY


Honeycomb glare protection	S10-BLE-80
Refractor for elliptical distribution	S10-OZL-80
Clear protective glass	S10-SGL-80
Diffuser protection glass	S10-WGL-80

Passive

Replacement of the reflector without the use of any tool . Passive cooling.

21


COLOR CHARTS | HOUSING & CABLES

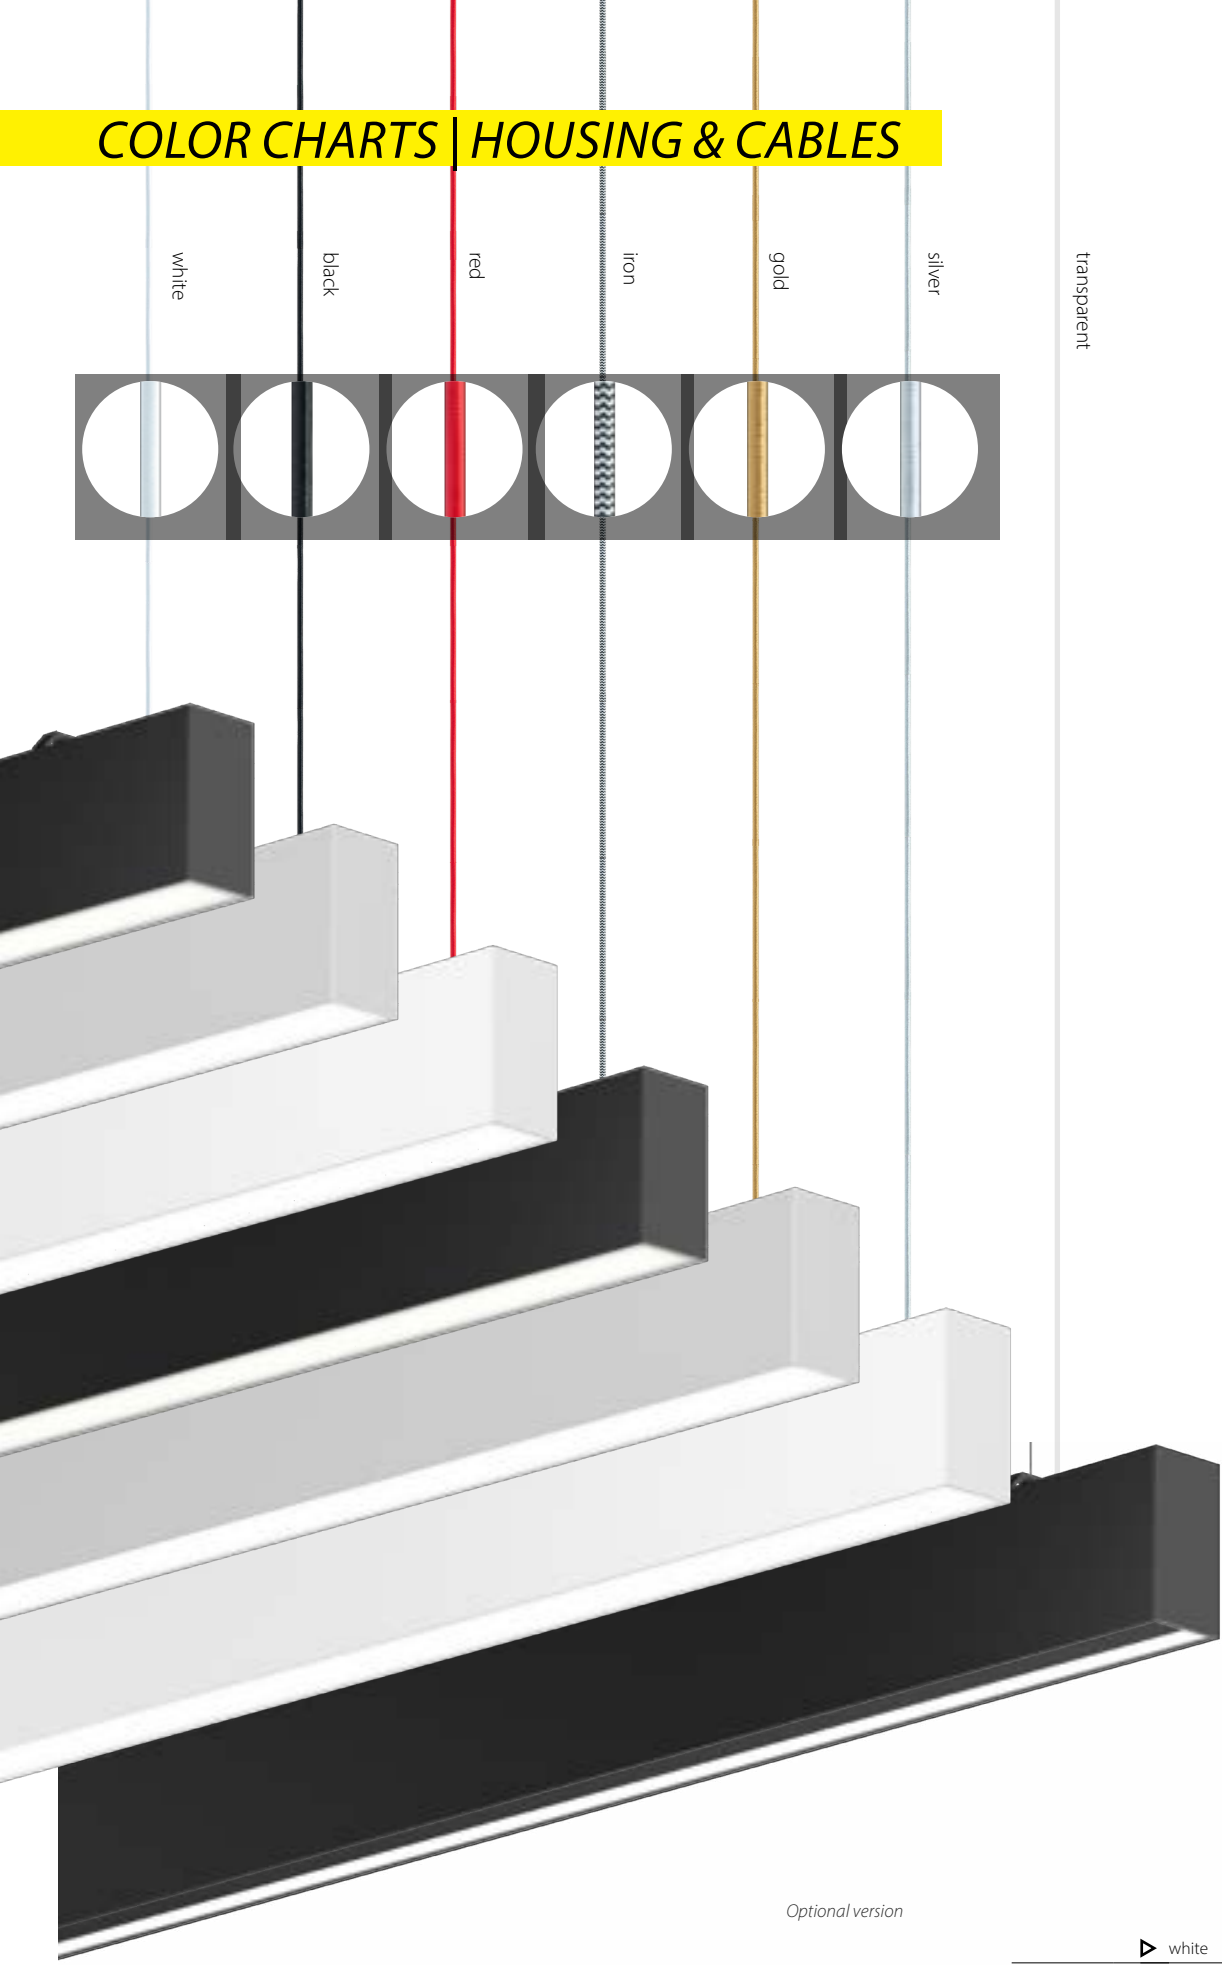

Optional version

Suspension cable

68.89"
5x0.029in.²

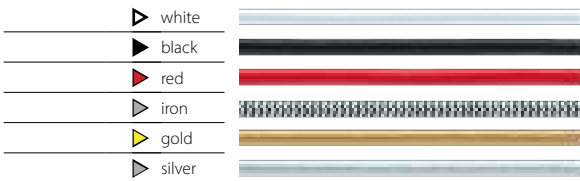

RAL OF YOUR CHOICE | OPTIONAL HOUSING COLORS



