



DATE:

CUSTOMER:


PROJECT:

QUANTITY:




SINUS-P *Ring LED Direct & Direct / Indirect Ceiling Pendant Lights*

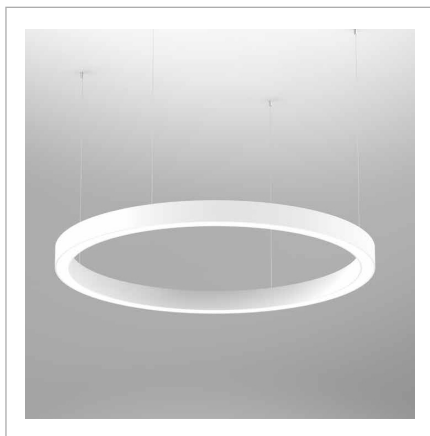

satiné direct



satiné direct/indirect

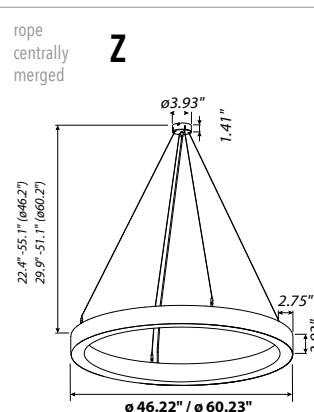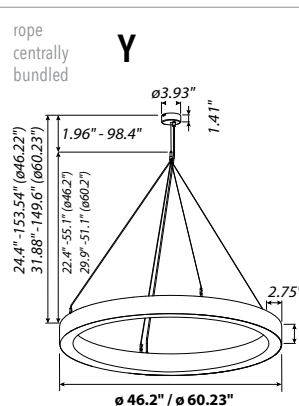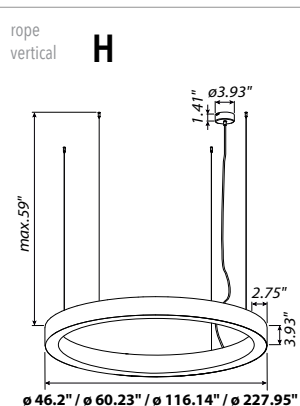

EXAMPLE:

FAMILY	ITEM# / SIZE	ILLUM STYLE	WATTAGE	LUMENS	CCT	CRI	DIFFUSER	FINISH	SUSP STYLE	DRIVER	INPUT VOLTAGE
SINUS	SNSPB - ø60.23"	DI	222	25529lm	40	80	S	S	Z	N	U



FAMILY	ITEM# / SIZE	ILLUM STYLE	WATTAGE	LUMENS	CCT		CRI		DIFFUSER	FINISH		SUSP STYLE		DRIVER		INPUT VOLTAGE	
SINUS																	
	SNSPA - ø46.22" SNSPB - ø60.23" SNSPC - ø116.14" SNSPD - ø227.95"	D  direct	81W 111W 222W 445W	8761lm 11681lm 23363lm 46725lm	30 3000K 40 4000K		80 80 90 90		S satiné	S silver W white B black R RAL 		H  rope vertical Y  rope centrally bundled Z  rope centrally merged		N non-dim A 0 - 10V		U universal	
		DI  direct / indirect	161W 222W 445W 889W	19147lm 25529lm 51059lm 102117lm													

NOTES

INCLUDED: Ø 5.0" mounting plate

WEB LINKS:

Product Page