Recessed Spots Fixed LED

Intertek | LED BUILT IN | 80 CRI | 2.87″ | 3.54″ ceiling depth | 36°

D10108D | 8W | COB LED | Dark Light *Recessed Spot*





* New Construction Housing Available
Driver Enclosure = 8″ x 10″ x 6″ w/10′ Standard Connecting Cable
Installation Depth = 6.5″

Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
ABSECON	D10108D-W-W	8W	600lm	3000K	36°	WHITE	IP20	120V - 277V
ABSECON	D10108D-B-W	8W	600lm	3000K	36°	BLACK	IP20	120V - 277V
ABSECON	D10108D-BS-W	8W	600lm	3000K	36°	BRASS	IP20	120V - 277V

Intertek | LED BUILT IN | 80 CRI | 2.67″ | 1.968″ ceiling depth | 60°

D10108R | 8W | COB LED | *Recessed Spot*



* New Construction Housing Available
Driver Enclosure = 8″ x 10″ x 6″ w/10′ Standard Connecting Cable
Installation Depth = 6.5″

Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
CASCO	D10108R-W-W	8W	560lm	3000K	60°	WHITE	IP20	120V - 277V
CASCO	D10108R-B-W	8W	560lm	3000K	60°	BLACK	IP20	120V - 277V

Intertek | LED BUILT IN | 80 CRI | 2.67″ | 3.346″ ceiling depth | 50°

D10108A | 8W | COB LED | Dark Light *Recessed Spot w/Asymmetric Reflector*



* New Construction Housing Available
Driver Enclosure = 8″ x 10″ x 6″ w/10′ Standard Connecting Cable
Installation Depth = 6.5″

Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
MUNRO	D10108R-W-W	8W	560lm	3000K	50°	WHITE	IP20	120V - 277V

Intertek | LED BUILT IN | 90 CRI | DIMMABLE Consult Factory | QUICK FIX | 36°

D10107WD | 7W | COB LED | Dark Light *Recessed Spot*

IP54 DARK LIGHT

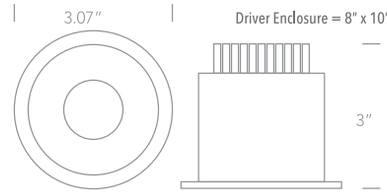

* New Construction Housing Available
Driver Enclosure = 8″ x 10″ x 6″ w/10′ Standard Connecting Cable
Installation Depth = 6.5″

Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
PRIZE	D10107WD	7W	500lm	3000K	36°	WHITE	IP54	120V - 277V

866.356.4458
solavantilighting.com

Intertek | LED BUILT IN | 80 CRI | 2.87″ | 3.346″ ceiling depth | 50°

D50108A | 8W | COB LED | Dark Light Recessed Spot w/*Asymmetric Reflector*

IP20 DARK LIGHT

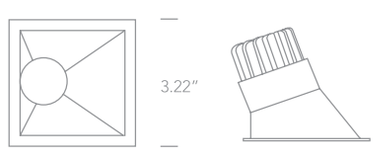

* New Construction Housing Available
Driver Enclosure = 8″ x 10″ x 6″ w/10′ Standard Connecting Cable
Installation Depth = 6.5″

Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
MUNRO	D50108A	8W	560lm	3000K	50°	WHITE	IP20	120V - 277V

Intertek | LED BUILT IN | 80 CRI | 2.87" | 4.13" ceiling depth | 36°

D10108D1 | 8W | COB LED | Dark Light *Recessed Spot*

IP20 DARK LIGHT

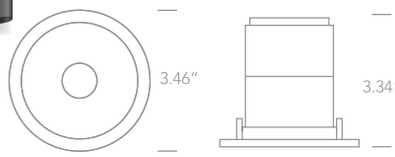

* New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"

Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
HEALY	D10108D1	8W	560lm	3000K	36°	WHITE	IP20	120V - 277V

Intertek | LED BUILT IN | 90 CRI | 2.95" | 2.75" ceiling depth | 36°

D10108H | 8W | COB LED | Dark Light *Recessed Spot*

IP54 DARK LIGHT

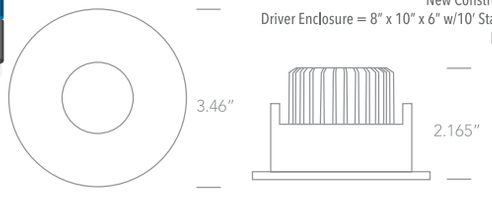

* New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"

Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
MIDWAY	D10108HW	8W	600lm	3000K	36°	WHITE	IP54	120V - 277V
MIDWAY	D10108HB	8W	600lm	3000K	36°	BLACK	IP54	120V - 277V

Intertek | LED BUILT IN | 80 CRI | DIMMABLE Consult Factory | QUICK FIX | 38°

D10107DL | 7W | COB LED | Dark Light *Recessed Spot*

IP44 DARK LIGHT



Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
SKIP	D10107DL	7W	450lm	3000K	38°	WHITE	IP44	120V - 277V

Intertek | LED BUILT IN | 80 CRI | DIMMABLE | QUICK FIX | 40°

D10112C | 12W | COB LED | Dark Light *Recessed Spot*

IP20 DARK LIGHT



* New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
BINDO	D10112C	12W	1100lm	3000K	60°	WHITE	0-10V	IP20	120V - 277V

D10106DC | 8W | COB LED | *Dark Light Recessed Spot, Dark Chrome Reflector*

Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
NICODC	D10106DCW	8W	570lm	3000K	36°	WHITE	IP20	120V - 277V
NICODC	D10106DCB	8W	570lm	3000K	36°	BLACK	IP20	120V - 277V

Intertek | LED BUILT IN | 90 CRI | 4.88" x 1.77" | 2.75" ceiling depth | 38°

D50306B | 12W | COB LED | *Recessed Spot, Dark Chrome Reflector*

IP20

Remote Driver Enclosure = 6" x 10" x 2" w/10' Standard Connecting Cable

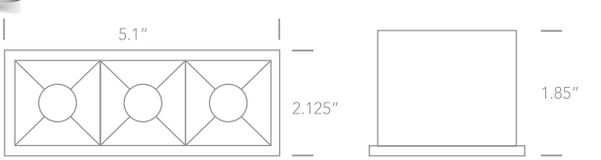

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
SENECA12	DD50306BW	12W	960lm	3000K	38°	WHITE	0-10V	IP20	120V - 277V
SENECA12	DD50306BB	12W	960lm	3000K	38°	BLACK	0-10V	IP20	120V - 277V

Intertek | LED BUILT IN | 90 CRI | 7.87" x 1.77" | 2.75" ceiling depth | 38°

D50506B | 20W | COB LED | *Recessed Spot, Dark Chrome Reflector*

IP20

Remote Driver Enclosure = 6" x 10" x 2" w/10' Standard Connecting Cable

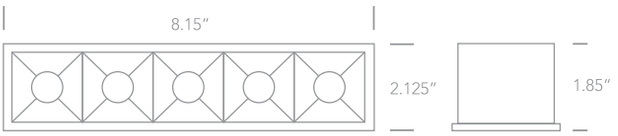

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
SENECA20	D50506BW	20W	1600lm	3000K	38°	WHITE	0-10V	IP20	120V - 277V
SENECA20	D50506BB	20W	1600lm	3000K	38°	BLACK	0-10V	IP20	120V - 277V

Intertek | LED BUILT IN | 90 CRI | 15.19" x 1.77" | 2.75" ceiling depth | 38°

D50006B | 40W | COB LED | *Recessed Spot, Dark Chrome Reflector*

IP20

Remote Driver Enclosure = 6" x 10" x 2" w/10' Standard Connecting Cable

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
SENECA40	D50006BW	40W	3200lm	3000K	38°	WHITE	0-10V	IP20	120V - 277V
SENECA40	D50006BB	40W	3200lm	3000K	38°	BLACK	0-10V	IP20	120V - 277V

Intertek | LED BUILT IN | 90 CRI | 3.34" x 3.34" | 2.75" ceiling depth | 38°

D50406B | 16W | COB LED | *Recessed Spot, Dark Chrome Reflector*

IP20

* New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"

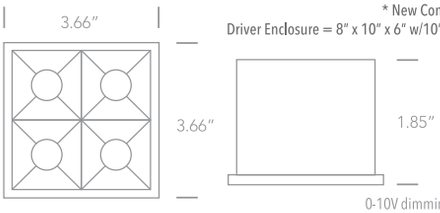

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
SENECA16	D50406BW	16W	1280lm	3000K	38°	WHITE	0-10V	IP20	120V - 277V
SENECA16	D50406BB	16W	1280lm	3000K	38°	BLACK	0-10V	IP20	120V - 277V

Intertek | LED BUILT IN | 85 CRI | QUICK FIX | 40°

D10102H | 2W | COB LED | *Dark Light Recessed Spot*

IP65 DARK LIGHT



Remote Driver Enclosure = 6" x 10" x 2" w/10' Standard Connecting Cable

120V Not dimmable, 277V consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
MABY	D10102HW	2W	100lm	3000K	40°	WHITE	IP65	120V - 277V
MABY	D10102HB	2W	100lm	3000K	40°	BLACK	IP65	120V - 277V

Intertek | LED BUILT IN | 90 CRI | DIMMABLE Consult Factory | QUICK FIX | 36°

D10107H | 7W | COB LED | *Dark Light Recessed Spot*

IP65 DARK LIGHT

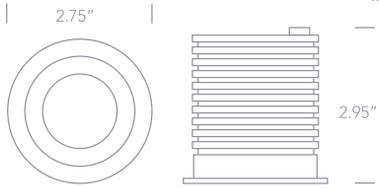

Remote Driver Enclosure = 6" x 10" x 2" w/10' Standard Connecting Cable

Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
PRIZE	D10107H	7W	530lm	4000K	36°	WHITE	IP65	120V - 277V

Intertek | LED BUILT IN | 80 CRI | TRIAC DIMMABLE | FIRE RATED | 60°

D10107DF | 7W | COB LED | *Fire-Rated Recessed Spot*

IP65

Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

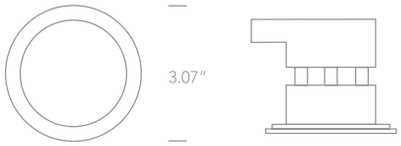

277V, consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
SKIP65F	D10107DFW	7W	500lm	3000K	60°	WHITE	IP65	120V - 277V