












Recessed Spots Adjustable LED

















D51106M | 6W | LED | Recessed Adjustable Spot

IP20





Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable







Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
MARLO	D51106M	6W	5400lm	4000K	24°	WHITE	IP20	120V - 277V



866.356.4458

solavantilighting.com



24

Recessed Spots Adjustable LED





D11103BD | 3W | COB LED | *Dark Light Recessed Adjustable Spot*





Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable



120V Not dimmable,
277V consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
MARLO	D11103BD	3W	220lm	3000K	36°	WHITE	0-10V	IP20	120V - 277V









LED
BUILT IN

90
CRI











D11107C | 7W | COB LED | *Recessed Adjustable Spot*





* New Construction Housing Available
Driver Endosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"




Consult for dimming








FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
PEP	D11107CW	7W	520lm	3000K	36°	WHITE	IP20	120V - 277V
PEP	D11107CB	7W	520lm	3000K	36°	BLACK	IP20	120V - 277V

26


Recessed Spots Adjustable LED








D11112TA | 12W | COB LED | *Dark Light Recessed Adjustable Spot*



IP20


DARK LIGHT



* New Construction Housing Available

Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable



Installation Depth = 6.5"











QUICK FIX

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
ARGUS	D11112TA	12W	1100lm	3000K	40°	WHITE	0-10V	IP20	120V - 277V






D51506B | 20W | COB LED | *Adjustable Recessed Spot, Dk Chrome Reflector*

IP20

Remote Driver Enclosure = 6" x 10" x 2" w/10' Standard Connecting Cable



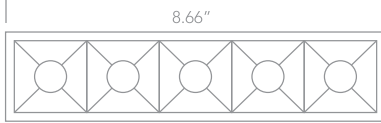










8.66" 2.67" 1.97"

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
SENECADJ	D51506BW	20W	1600lm	3000K	38°	WHITE	0-10V	IP20	120V - 277V
SENECADJ	D51506BB	20W	1600lm	3000K	38°	BLACK	0-10V	IP20	120V - 277V







D51406B | 16W | COB LED | *Adjustable Recessed Spot, Dk Chrome Reflector*

IP20

* New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"



4.29" 4.29" 3.15"

0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
VERSAQUAD	D51406BW	16W	1280lm	3000K	38°	WHITE	0-10V	IP20	120V - 277V
VERSAQUAD	D51406BB	16W	1280lm	3000K	38°	BLACK	0-10V	IP20	120V - 277V