



Ceiling Surface LED







D12108LA | 8W | COB LED Adjustable Ceiling Downlight

IP20





Each fixture includes a 5" round mounting plate for attaching to a standard 3" octagonal junction box. Color will match fixture.








\*variable CCT:  
3000K - 4000K - 5000K Adjustable

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
APONE	D12108LAW	8W	600lm	*variable	25°	WHITE	0-10V	IP20	120V - 277V
APONE	D12108LAB	8W	600lm	*variable	25°	BLACK	0-10V	IP20	120V - 277V



30  
Ceiling Surface LED







**D12208LA** | 2 X 8W | COB LED Adjustable Ceiling Downlight








Each fixture includes a 4.5" x 6.5" rectangular mounting plate for attaching to a standard 3" octagonal junction box. Color will match fixture.

\*variable CCT:  
3000K - 4000K - 5000K Adjustable

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
APONE	D12208LAW	2X8W	2X600lm	*variable	25°	WHITE	0-10V	IP20	120V - 277V
APONE	D12208LAB	2X8W	2X600lm	*variable	25°	BLACK	0-10V	IP20	120V - 277V














**D12107B** | 7W | COB LED Surface Dimmable Spot

Each fixture includes a 4.5" square mounting plate for attaching to a standard 3" octagonal junction box. Color will match fixture.



Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
KELLY	D121017B	7W	550lm	3000K	36°	WHITE	NON-DIM	IP20	120V - 277V




**D12106B** | 6W | COB LED Surface Spot With Dark Chrome Reflector










Each fixture includes a 4.5\" square mounting plate for attaching to a standard 3\" octagonal junction box. Color will match fixture.



Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
KELLY	D12106B	6W	480lm	3000K	38°	WHITE	NON-DIM	IP20	120V - 277V




**D12406B** | 15W | COB LED Surface Spot With Dark Chrome Reflector










Each fixture includes a 4.5\" square mounting plate for attaching to a standard 3\" octagonal junction box. Color will match fixture.



0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
KELLY	D12406BW	15W	1200lm	3000K	38°	WHITE	0-10V	IP20	120V - 277V



**D12906B** | 30W | COB LED Surface Spot With Dark Chrome Reflector


Each fixture includes a 6.5\" square mounting plate for attaching to a standard 3\" octagonal junction box. Color will match fixture.








0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
KELLY	D12906BW	30W	2400lm	3000K	38°	WHITE	0-10V	IP20	120V - 277V



32  
Ceiling Surface LED






**D12108X** | 8W | COB LED | *Surface Dimmable, Adjustable Aluminum Body Cylinder*

**IP20**

3.15"

3.94"



Each fixture includes a 5" round mounting plate for attaching to a standard 3" octagonal junction box. Color will match fixture.

Consult for dimming

FAMILY	ITEM#	WATTAGE	LIGHT COLOR	CCT	BEAM	LUMENS	FINISH	DRIVER	INPUT VOLTAGE
APONE	D12108XW	8W	Warm White	3000K	36°	640lm	WHITE	NON-DIM	120V-277V











866.356.4458

**solavanti**lighting.com










**D12108XA** | 8W | COB LED | *Surface Dimmable, Adjustable Aluminum Body Cylinder*

**IP20**





Each fixture includes a 4.5" square mounting plate for attaching to a standard 3" octagonal junction box. Color will match fixture.







Consult for dimming

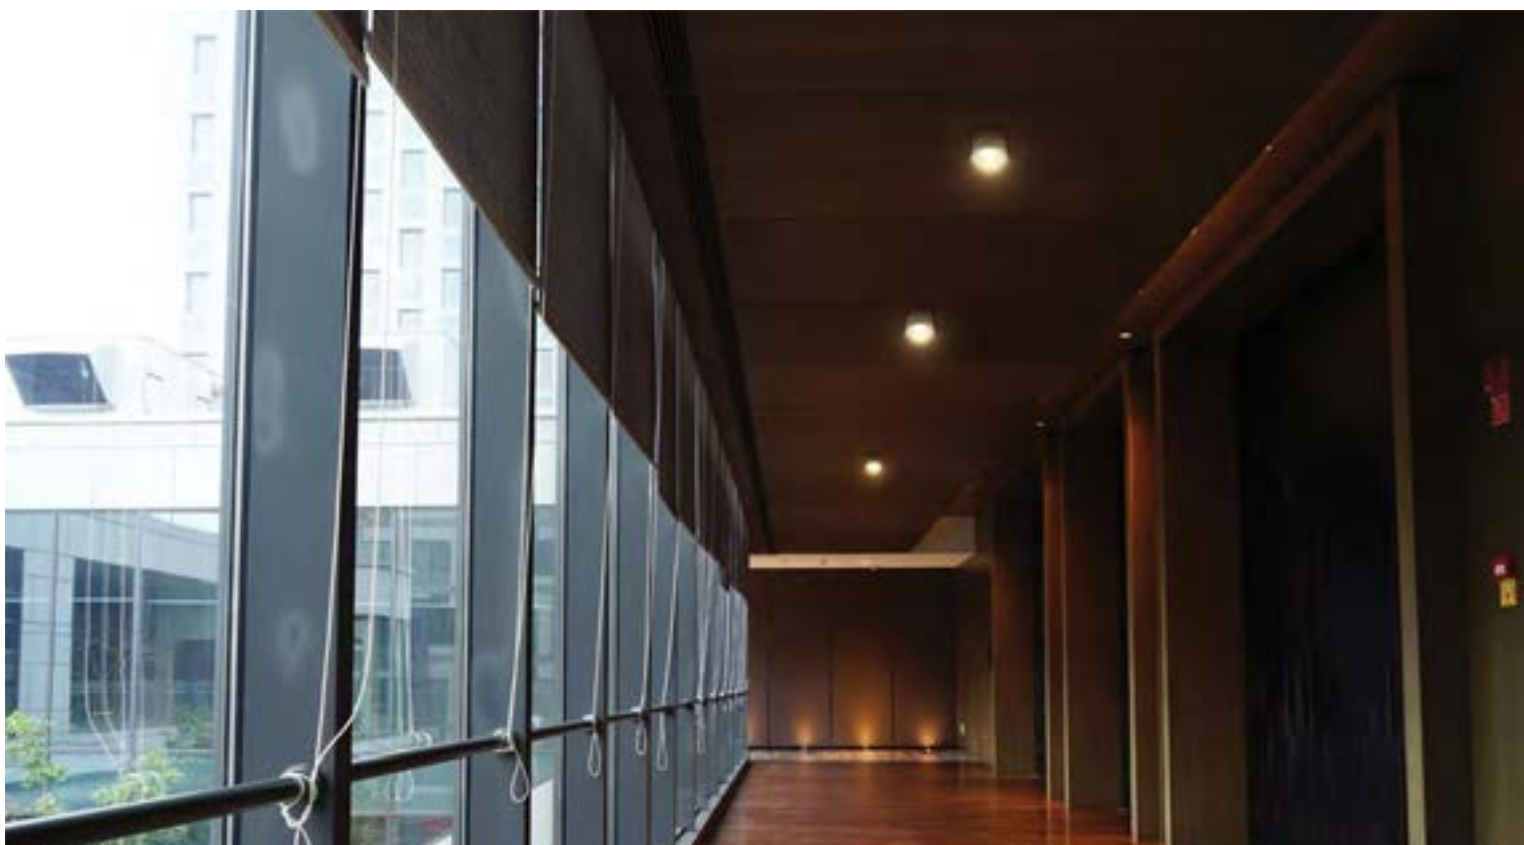FAMILY	ITEM#	WATTAGE	LIGHT COLOR	CCT	BEAM	LUMENS	FINISH	DRIVER	INPUT VOLTAGE
APONE	D12108XAW	8W	Warm White	3000K	36°	640lm	WHITE	NON-DIM	120V-277V











D67380 | 10W | COB LED Ceiling Surface Cylinder










Each fixture includes a 5" round mounting plate for attaching to a standard 3" octagonal junction box. Color will match fixture.

Consult for dimming



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
STUDEN	D67380	10W	700lm	3000K	60°	WHITE	0-10V	IP54	120V-277V







D67380A | 25W | COB LED Ceiling Surface Cylinder



0-10V dimming option, available for 277V

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
STUDEN	D67380A	25W	1800lm	3000K	60°	WHITE	0-10V	IP54	120V-277V







Each fixture includes a 5" round mounting plate for attaching to a standard 3" octagonal junction box. Color will match fixture.

**D67138C** | 6W | Indoor / Outdoor LED Ceiling Surface Cylinder





FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
VIRO	D67138CW	6W	440lm	3000K	35°	WHITE	NON-DIM	IP54	120V-277V
VIRO	D67138CAN	6W	440lm	3000K	35°	ANTHRACITE	NON-DIM	IP54	120V-277V
VIRO	D67138CB	6W	440lm	3000K	35°	BLACK	NON-DIM	IP54	120V-277V







Each fixture includes a 4.5" square mounting plate for attaching to a standard 3" octagonal junction box. Color will match fixture.

**D67138D** | 6W | Indoor / Outdoor LED Ceiling Surface Cube





FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
VIRO	D67138DW	6W	440lm	3000K	35°	WHITE	NON-DIM	IP54	120V-277V
VIRO	D67138DAN	6W	440lm	3000K	35°	ANTHRACITE	NON-DIM	IP54	120V-277V
VIRO	D67138DB	6W	440lm	3000K	35°	BLACK	NON-DIM	IP54	120V-277V
VIRO	D67138DG	6W	440lm	3000K	35°	GREY	NON-DIM	IP54	120V-277V