









Recessed Wall LED








* New Construction Housing Available
Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
Installation Depth = 6.5"


D68007 | 1.5W | LED Dark Light Recessed Wall Light















Not dimmable.


FAMILY	ITEM#	WATTAGE	CCT	FINISH	IP RATING	INPUT VOLTAGE
LEEN	D68007W	1.5W	3000K	WHITE	IP20	120V
LEEN	D68007B	1.5W	3000K	BLACK	IP20	120V



D68078 | 2W | LED Dark Light | Aluminum Wall Recessed Light



Requires 700mA Driver
Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

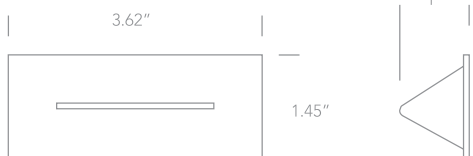120V Not dimmable,
277V consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
FERDOW	D68078WW	2W	80lm	3000K	G	WHITE	IP20	120V - 277V


866.356.4458







solavantilighting.com









D68004 | 3W | LED Dark Light *Decorative Recessed Wall Light*




Requires 350mA Driver
Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable






120V Not dimmable,
277V consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
BULGA	D68004W	3W	120lm	3000K	24°	WHITE	IP54	120V - 277V
BULGA	D68004AL	3W	120lm	3000K	24°	ALUM	IP54	120V - 277V









* New Construction Housing Available
 Driver Enclosure = 8" x 10" x 6" w/10' Standard Connecting Cable
 Installation Depth = 6.5"

D68006N | 1W | LED | Dark Light Indoor / Outdoor Recessed Wall Light





Not dimmable,

FAMILY	ITEM#	WATTAGE	LIGHT COLOR	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
MURUN	D68006NW	1W	Warm White	3000K	G	WHITE	IP44	120V - 277V





**LED
BUILT IN**







Includes 700mA Driver
Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

D68030 | 3W | LED Dark Light Recessed Wall Light





IP54
DARK
LIGHT



120V Not dimmable,
277V consult for dimming

FAMILY	ITEM#	WATTAGE	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
LOREN	D68030W	3W	3000K	G	WHITE	IP54	120V - 277V
LOREN	D68030B	3W	3000K	G	BLACK	IP54	120V - 277V
LOREN	D68030AL	3W	3000K	G	ALUM	IP54	120V - 277V









Remote Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

D68032 | 3W | LED Dark Light Recessed Wall Light











2.75"
1.77"

Consult for dimming

FAMILY	ITEM#	WATTAGE	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
LOREN	D68032G	3W	3000K	G	GREY	IP54	120V-277V
LOREN	D68032B	3W	3000K	G	BLACK	IP54	120V-277V
LOREN	D68032AL	3W	3000K	G	ALUM	IP54	120V-277V











LED BUILT IN


80 CRI








D68072A | 5W | LED Recessed Wall Light

IP65

Includes 350mA Remote Driver
Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable








4.72"

1.89"



2.63"

Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
FERDOW	D68072A	5W	100lm	3000K	G	316 STNLS STEEL	IP65	120V - 277V











866.356.4458

solavantilighting.com






Includes 350mA Remote Driver
Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable


D68072C | 10W | LED Recessed Wall Light



10.63"


2.63"








2.48"



Consult for dimming

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	DRIVER	IP RATING	INPUT VOLTAGE
FERDOW	D68072C	10W	200lm	3000K	G	316 STNLS STEEL	0-10V	IP65	120V-277V




Includes 350mA Remote Driver
Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable


120V Not dimmable,
277V consult for dimming

D68068 | 3W | LED Dark Light Recessed Wall Light



1.38"

4.49"



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
YAZ	D68068AN	3W	290lm	3000K	G	ANTHRACITE	IP65	120V - 277V











Includes 350mA Remote Driver
Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

Consult for dimming

D68068C | 6W | LED Dark Light Recessed Wall Light





2.16"

8.86"

2.95"



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
YAZ	D68068CW	6W	540lm	3000K	G	WHITE	IP65	120V - 277V
YAZ	D68068CAN	6W	540lm	3000K	G	ANTHRACITE	IP65	120V - 277V
YAZ	D68068CB	6W	540lm	3000K	G	BLACK	IP65	120V - 277V
YAZ	D68068CG	6W	540lm	3000K	G	GREY	IP65	120V - 277V










Remote Driver
Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

120V Not dimmable,
277V consult for dimming

D68068A | 3W | LED Dark Light Recessed Wall Light




IP65
DARK LIGHT

1.38" |
4.52" x
4.52"


FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
YAZ	D68068AW	3W	290lm	3000K	G	WHITE	IP65	120V - 277V
YAZ	D68068AAN	3W	290lm	3000K	G	ANTHRACITE	IP65	120V - 277V
YAZ	D68068AB	3W	290lm	3000K	G	BLACK	IP65	120V - 277V
YAZ	D68068AG	3W	290lm	3000K	G	GREY	IP65	120V - 277V











Remote Driver
Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

120V Not dimmable,
277V consult for dimming

D68062 | 3.6W | LED Dark Light Recessed Wall Light



IP65
DARK LIGHT

2.56" |
4.21" |
2.95"

FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
KAHN	D68062W	3.6W	45lm	3000K	53°	WHITE	IP65	120V - 277V
KAHN	D68062AN	3.6W	45lm	3000K	53°	ANTHRACITE	IP65	120V - 277V





**LED
BUILT IN**

**80
CRI**




44°

Remote Driver
Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

120V Not dimmable,
277V consult for dimming

D68064 | 3.6W | LED Dark Light Recessed Wall Light



IP65
DARK LIGHT



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
KAHN	D68064W	3.6W	45lm	3000K	44°	WHITE	IP65	120V - 277V
KAHN	D68064AN	3.6W	45lm	3000K	44°	ANTHRACITE	IP65	120V - 277V
KAHN	D68064G	3.6W	45lm	3000K	44°	GREY	IP65	120V - 277V





**LED
BUILT IN**

**80
CRI**




44°

Remote Driver
Driver Enclosure = 6" x 10" x 2"
w/10' Standard Connecting Cable

Consult for dimming

D68066 | 8.5W | LED Dark Light Recessed Wall Light



IP65
DARK LIGHT



FAMILY	ITEM#	WATTAGE	LUMENS	CCT	BEAM	FINISH	IP RATING	INPUT VOLTAGE
KAHN	D68066W	8.5W	160lm	3000K	G	WHITE	IP65	120V - 277V
KAHN	D68066AN	8.5W	160lm	3000K	G	ANTHRACITE	IP65	120V - 277V
KAHN	D68066G	8.5W	160lm	3000K	G	GREY	IP65	120V - 277V

